


CINCINNATI DEP CON
126.65 254.25 (001°-180°)
128.7 254.25 (181°-360°)
D-ATIS 135.3
CLNC DEL
127.175
CPDLC
GND CON
121.7
CINCINNATI TOWER
118.3 (RWYS 18C/36C, 9/27)
118.975 360.85 (RWY 18L/36R)
133.325 (RWY 18R/36L)


RADAR required.

TOP ALTITUDE:
(JETS) 5000
(PROPS) 4000

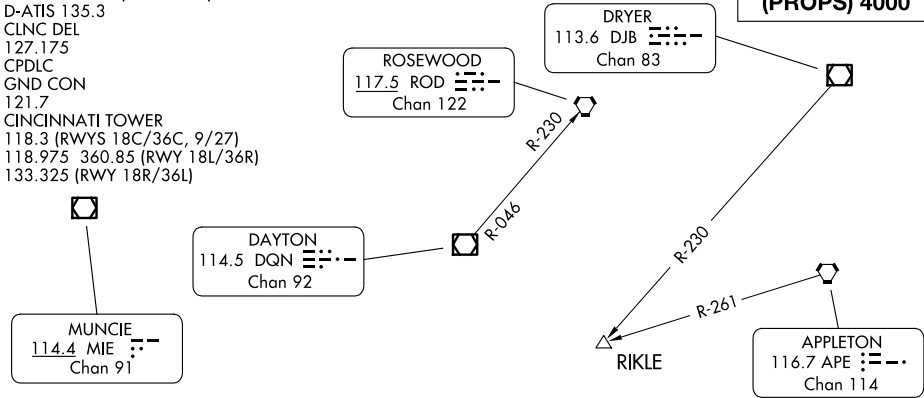

NOTE: SPECIAL INSTRUCTIONS: Appropriate departure frequency will be assigned by ATC.


NOTE: Jets accelerate to 250K until reaching 10000 MSL,
if unable, advise ATC.

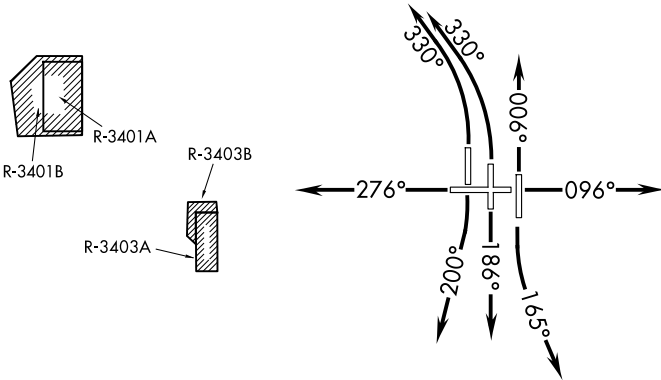

TAKEOFF MINIMUMS:
Rwys 9, 18L/C/R, 27,
36L/C/R: Standard.

LOUISVILLE
114.8 IUU
Chan 95

LEXINGTON
112.6 HYK
Chan 73



NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)