
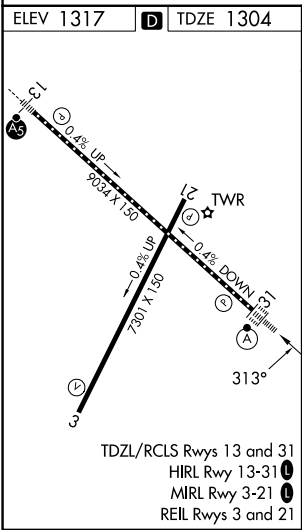


WAAS CH 49028 W31A	APP CRS 313°	Rwy Ldg TDZE 1304 Apt Elev 1317	9033
--	------------------------	---	-------------

RNAV (GPS) RWY 31

ROCHESTER INTL (RST)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.		ALSf-2 	MISSED APPROACH: Climb to 3000 direct CORDY and hold.	
ATIS 120.5	ROCHESTER APP CON* 119.8 251.125	ROCHESTER TOWER* 118.3 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95

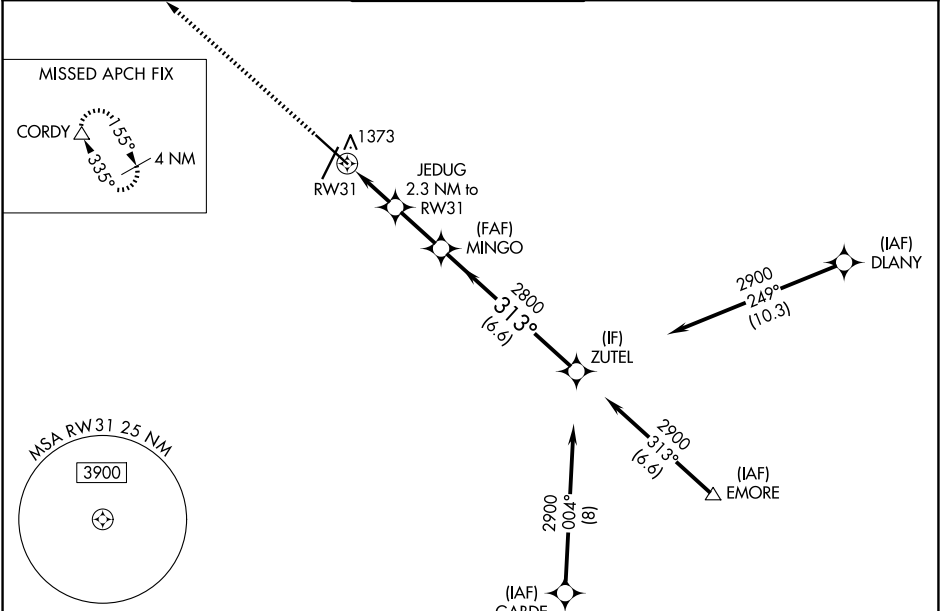

3000 CORDY		ZUTEL			
JEDUG 2.3 NM to RW31		MINGO 2800			
RW31 0.9 NM to RW31		2100			
RW31 0.9 NM		1.5 NM		2.2 NM	
CATEGORY		A	B	C	D
LPV DA		1504/18 200 (200-½)			
LNAV/VNAV DA		1579/24 275 (300-½)			
LNAV MDA		1640/24	336 (400-½)	1640/26	336 (400-½)
CIRCLING		1720-1 403 (500-1)	1780-1 463 (500-1)	1900-1½ 583 (600-1½)	1900-2 583 (600-2)