

WAAS
CH **56215**
W33A

APP CRS
332°

Rwy Ldg **6500**
TDZE **11**
Apt Elev **15**

RNAV (GPS) RWY 33

LAKE CHARLES RGNL (LCH)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 43°C. Inop table does not apply to LPV all Cats. For inop ALS, increase ASR LNAV/VNAV all Cats visibility to ½ SM.


MALSF

MISSED APPROACH: Climb to 1700 direct ZUKLA and hold.

ATIS 118.75	LAKE CHARLES APP CON★ 119.35 353.75	LAKE CHARLES TOWER★ 120.7 (CTAF) 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

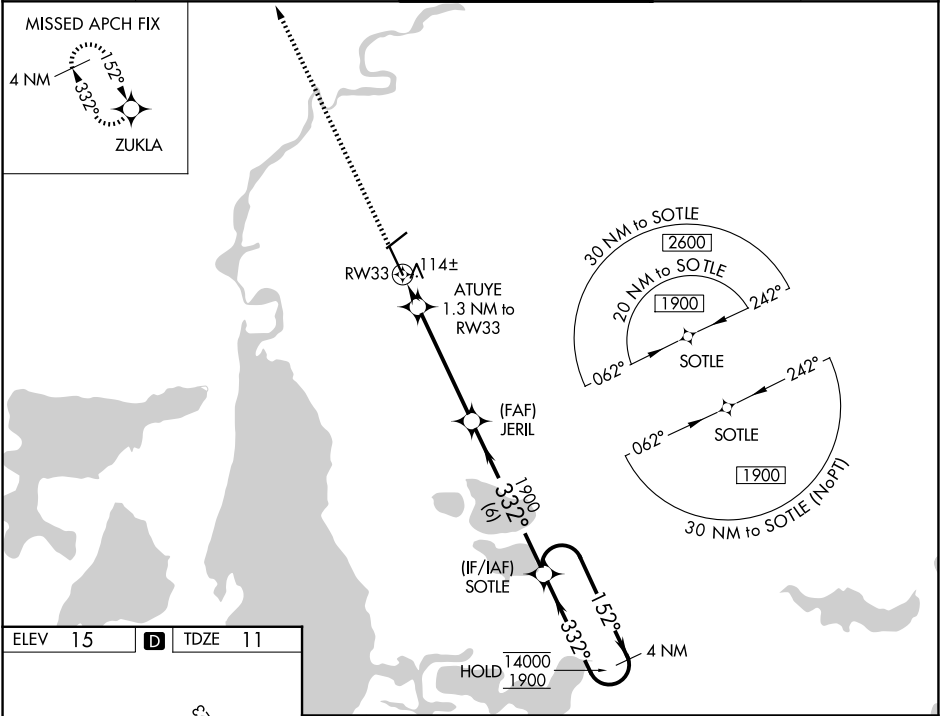

ELEV 15	D	TDZE 11
---------	---	---------

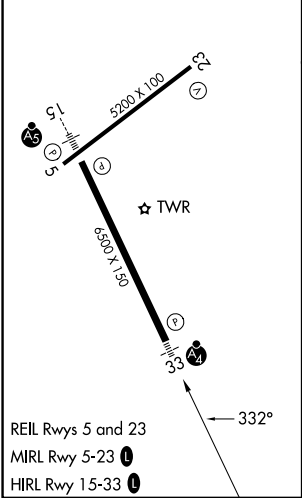

1700	ZUKLA	ATUYE 1.3 NM to RW33	JERIL 1900	SOTLE	4 NM Holding Pattern
		1.3 NM	4.5 NM	6 NM	
CATEGORY	A	B	C	D	
LPV DA		211-¾	200 (200-¾)		
LNAV/VNAV DA		296-¾	285 (300-¾)		
LNAV MDA		380-¾	369 (400-¾)		
CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)	