

WAAS CH 86713 W26B	APP CRS 267°	Rwy Ldg 10001 TDZE 790 Apt Elev 794
--	------------------------	--

RNAV (GPS) RWY 26L

GERALD R FORD INTL (G.R.R)

▼



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV Cat D visibility to RVR 5000.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:

Climb to 2700 direct FERLI and track 267° to JAKES and hold.

ATIS 118.725	GREAT LAKES APP CON★ 128.4 257.6	GRAND RAPIDS TOWER★ 135.65 (CTAF) 0 339.8	GND CON 121.8	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

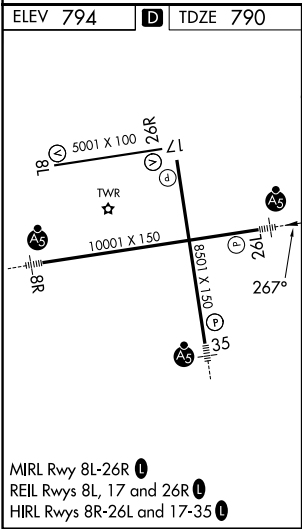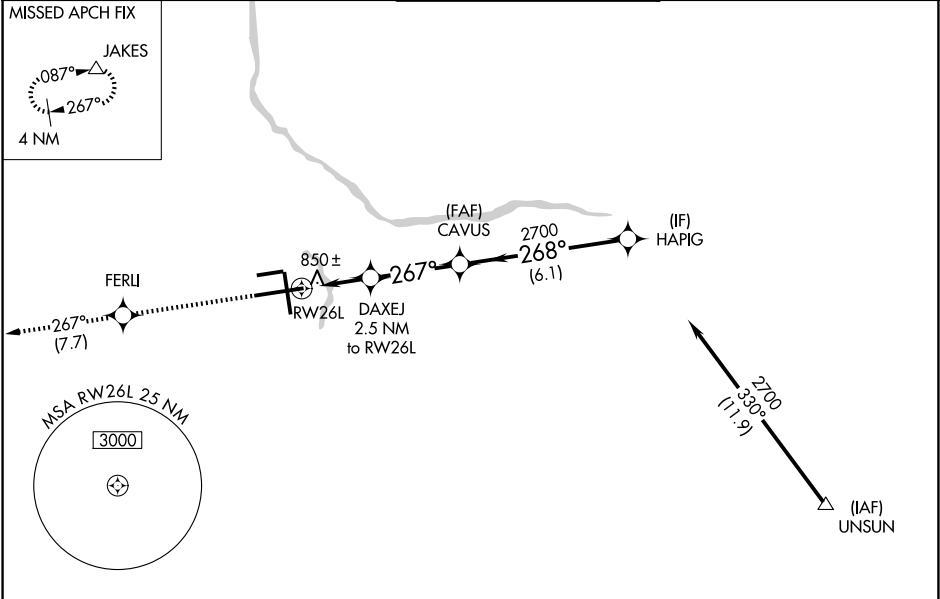

2700	FERLI	tr 267°	JAKES	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00°/TCH 73).	
* LNAV only.		DAXEJ 2.5 NM to RW26L	CAVUS 2700	HAPIG	
		* 1.3 NM to RW26L	* 1640	2700	GP 3.00° TCH 55
		1.3 NM	1.2 NM	3.2 NM	6.1 NM
CATEGORY	A		B	C	D
LPV DA **	990/24 200 (200-½)				
LNAV/VNAV DA	1114/24		324 (400-½)	1114/40 324 (400-¾)	
LNAV MDA	1280/24	490 (500-½)	1280/40 490 (500-¾)	1280/50 490 (500-1)	
CIRCLING	1280-1	486 (500-1)	1340-1½ 546 (600-1½)	1360-2 566 (600-2)	