

WAAS
CH **81812**
W05A

APP CRS
051°

Rwy Idg
TDZE **726**
Apt Elev **728**

6001

726

728

RNAV (GPS) RWY 5

WAUKEGAN NTL (UGN)

RNP APCH - GPS.

▼

▲

Rwy 5 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 14, 32 NA at night.


MISSED APPROACH: Climb to 2300 direct LIRIC and hold.

ATIS
132.4

CHICAGO APP CON
120.55

WAUKEGAN TOWER ★
120.05(CTAF) **273.55**

GND CON
121.65

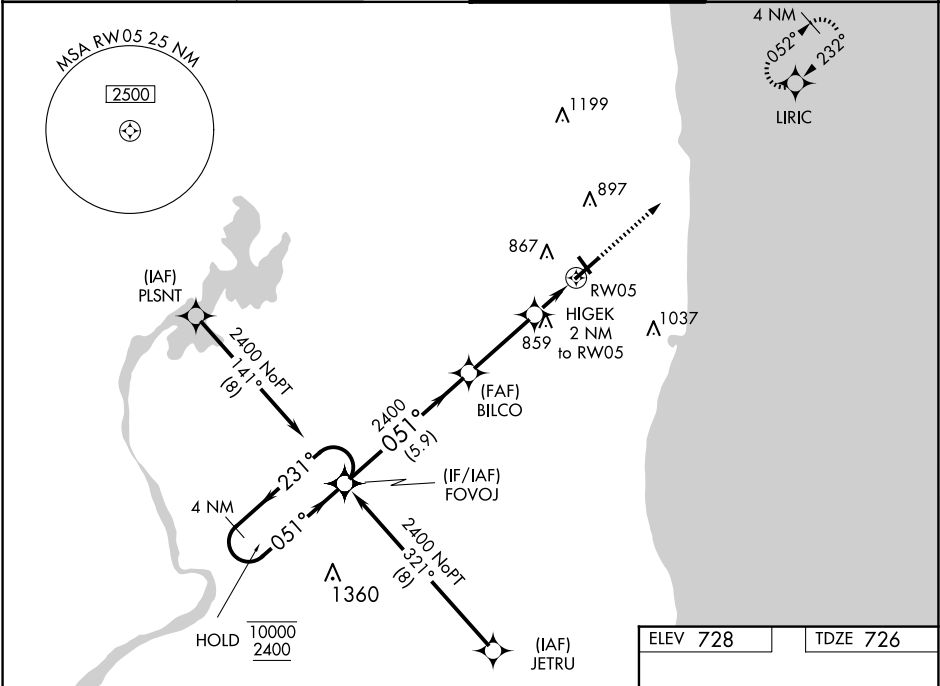

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 35).

2300 LIRIC

FOVOJ

BILCO

HIGKE 2 NM to RW05

1.1 NM to RW05

RW05

10000 2400

231°

051°

051°

2400

1400

GP 3.00° TCH 40

5.9 NM

3.1 NM

0.9 NM

1.1 NM

CATEGORY	A	B	C	D
LPV DA	976- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	1013- $\frac{7}{8}$ 287 (300- $\frac{7}{8}$)			
LNAV MDA	1120-1	394 (400-1)	1120-1 $\frac{1}{8}$	394 (400-1 $\frac{1}{8}$)
CIRCLING	1220-1	492 (500-1)	1220-1 $\frac{1}{2}$ 492 (500-1 $\frac{1}{2}$)	1400-2 $\frac{1}{4}$ 672 (700-2 $\frac{1}{4}$)

051°

6001 X 150

Up 32

TWR

REIL Rwy 5

HIRL Rwy 5-23

MIRL Rwy 14-32