


WAAS CH 49222 W08A	APP CRS 084°	Rwy Idg TDZE Apt Elev	6002 698 698
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 8

WEST MICHIGAN RGNL (BIV)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct JAVPO and hold.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Muskegon altimeter setting: increase LPV DA to 1018 feet, increase LNAV/VNAV DA to 1160 feet, and all visibilities ¼ SM, increase all MDAs 80 feet, and visibility LNAV Cat C/D ¼ SM and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Muskegon altimeter setting.			
ASOS 119.025	GREAT LAKES APP CON* 133.825 290.35	CLNC DEL 123.95	UNICOM 123.05 (CTAF) 1

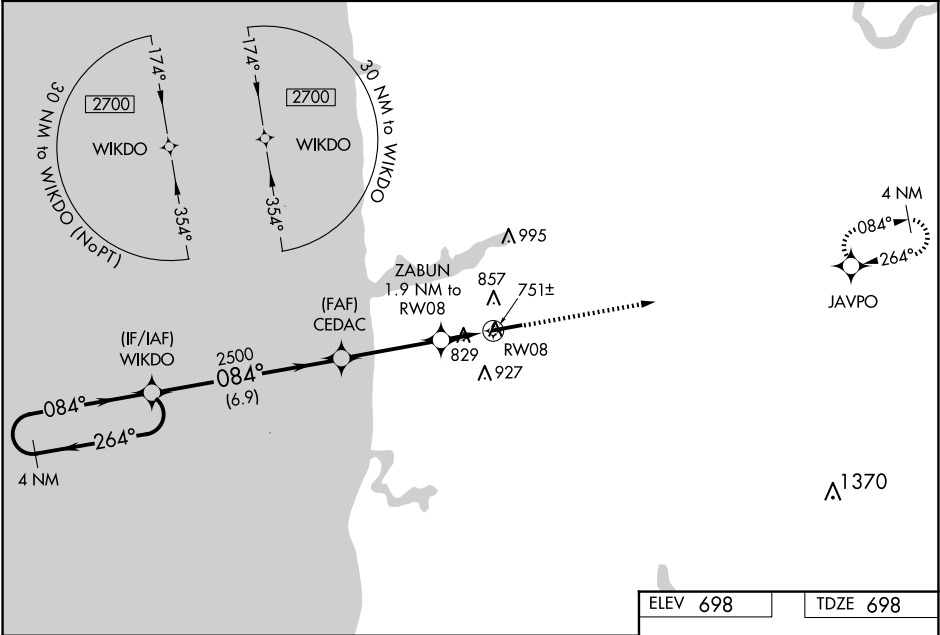

4 NM Holding Pattern WIKDO		*LNAV only		3000	JAVPO
2700 ← 264° 084° →		CEDAC 2500		ZABUN 1.9 NM to RWY 08	
GP 3.00° TCH 40		2500		1.1 NM to RWY 08	
		*1340		RWY 08	
		6.9 NM		0.8 NM	1.1 NM
CATEGORY	A	B	C	D	
LPV DA	948-7⁄8		250 (300-7⁄8)		
LNAV/VNAV DA	1080-1 1⁄8		382 (400-1 1⁄8)		
LNAV MDA	1080-1	382 (400-1)	1080-1 1⁄8	382 (400-1 1⁄8)	
CIRCLING	1200-1 502 (600-1)	1240-1 542 (600-1)	1240-1 1⁄2 542 (600-1 1⁄2)	1320-2 622 (700-2)	

