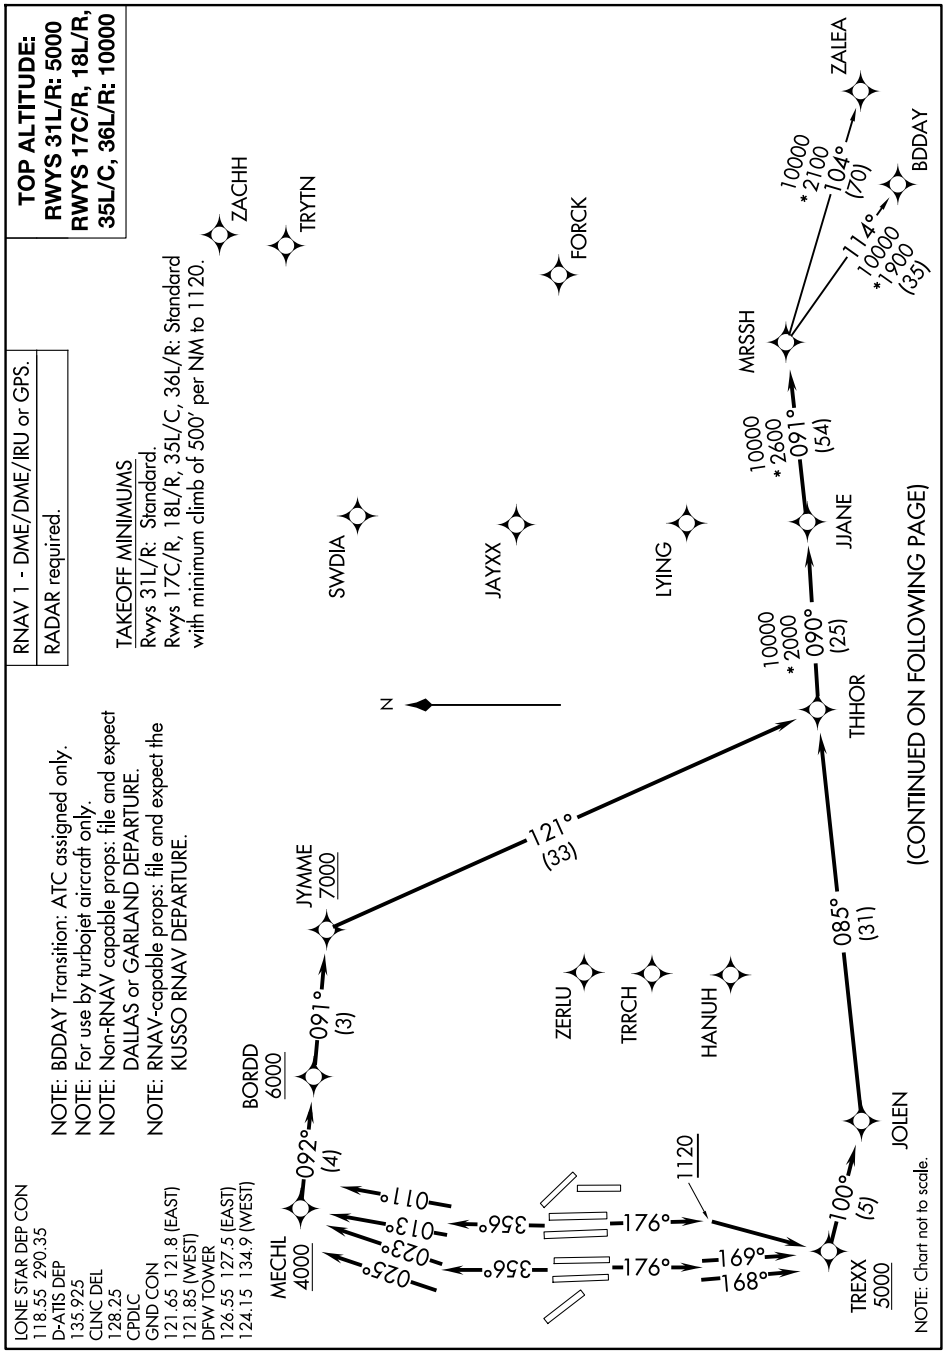
TOP ALTITUDE:
RWYS 31L/R: 5000
RWYS 17C/R, 18L/R, 35L/C, 36L/R: 10000
RNAV 1 - DME/DME/IRU or GPS.
RADAR required.
TAKEOFF MINIMUMS
Rwys 31L/R: Standard.
Rwys 17C/R, 18L/R, 35L/C, 36L/R: Standard with minimum climb of 500′ per NM to 1120.
NOTE: BDDAY Transition: ATC assigned only.
NOTE: For use by turbojet aircraft only.
NOTE: Non-RNAV capable props: file and expect DALLAS or GARLAND DEPARTURE.
NOTE: RNAV-capable props: file and expect the KUSSO RNAV DEPARTURE.
LONE STAR DEP CON
118.55 290.35
D-ATIS DEP
135.925
CLNC DEL
128.25
CPDLC
GND CON
121.65 121.8 (EAST)
121.85 (WEST)
DFW TOWER
126.55 127.5 (EAST)
124.15 134.9 (WEST)
N
ZACHH
TRYTN
FORCK
ZALEA
BDDAY
SWDIA
JAYXX
LYING
MRSSH
JJANE
THHOR
JYMME
7000
121°
(33)
10000
*2100
104°
(70)
114°
10000
*1900
(35)
10000
*2600
091°
(54)
10000
*2000
090°
(25)
085°
(31)
ZERLU
TRRCH
HANUH
JOLEN
BORDD
6000
091°
(3)
092°
(4)
MECHL
4000
011°
013°
023°
025°
356°
356°
176°
176°
1120
169°
168°
100°
(5)
TREXX
5000
NOTE: Chart not to scale.
(CONTINUED ON FOLLOWING PAGE)