


WAAS CH 90342 W31B	APP CRS 311°	Rwy Ldg 8373 TDZE 523 Apt Elev 607
--	------------------------	---


RNAV (GPS) Y RWY 31R

DALLAS-FORT WORTH INTL (DFW)

RNP APCH. For inop ALS, increase LP Cat C/D visibility to RVR 5500 and LNAV Cat C/D visibility to RVR 6000.		MALSR	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SOLDO and hold.	
D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 135.5 125.2	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25
		CPDLC		

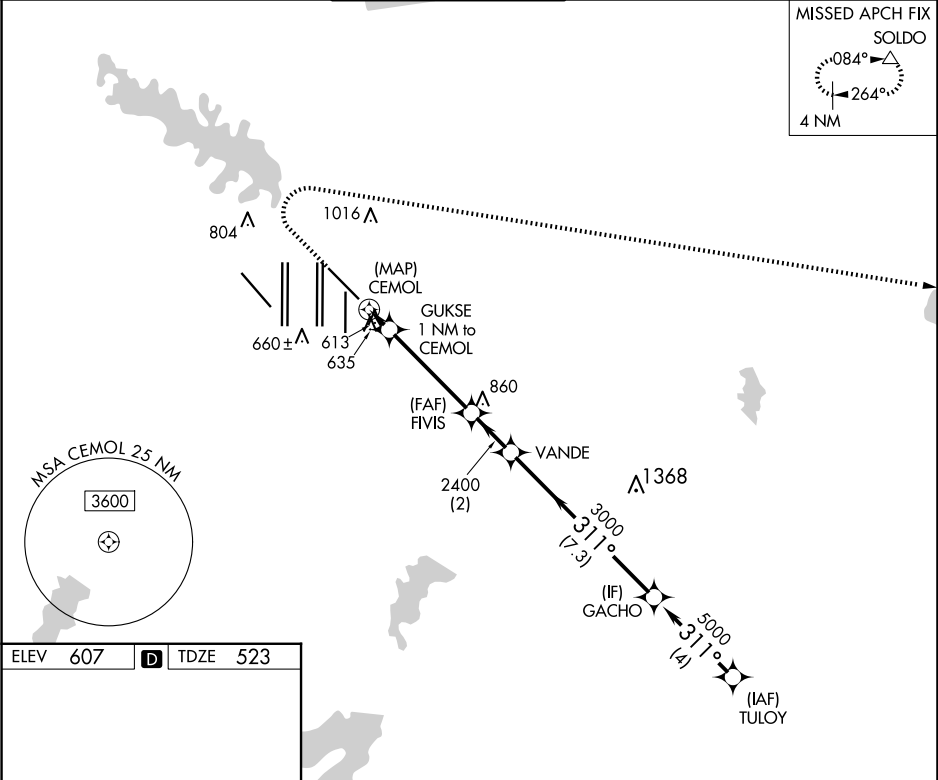

ELEV 607	D	TDZE 523
-----------------	----------	-----------------

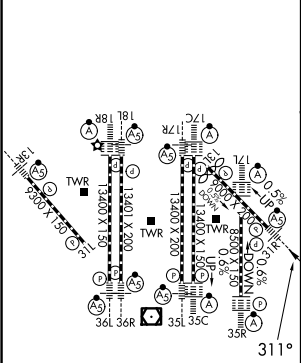

1000	3000	SOLDO	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 69).	
GACHO		TULOY		
CEMOL		FIVIS	VANDE	GACHO
1060		2400	3000	5000
TCH 53		311°	5000	
0.6 1		4.2 NM	2 NM	7.3 NM
CATEGORY	A	B	C	D
LP MDA	880/24	357 (300-½)	880/30	357 (300-⅝)
LNAV MDA	940/24	417 (400-½)	940/40	417 (400-¾)