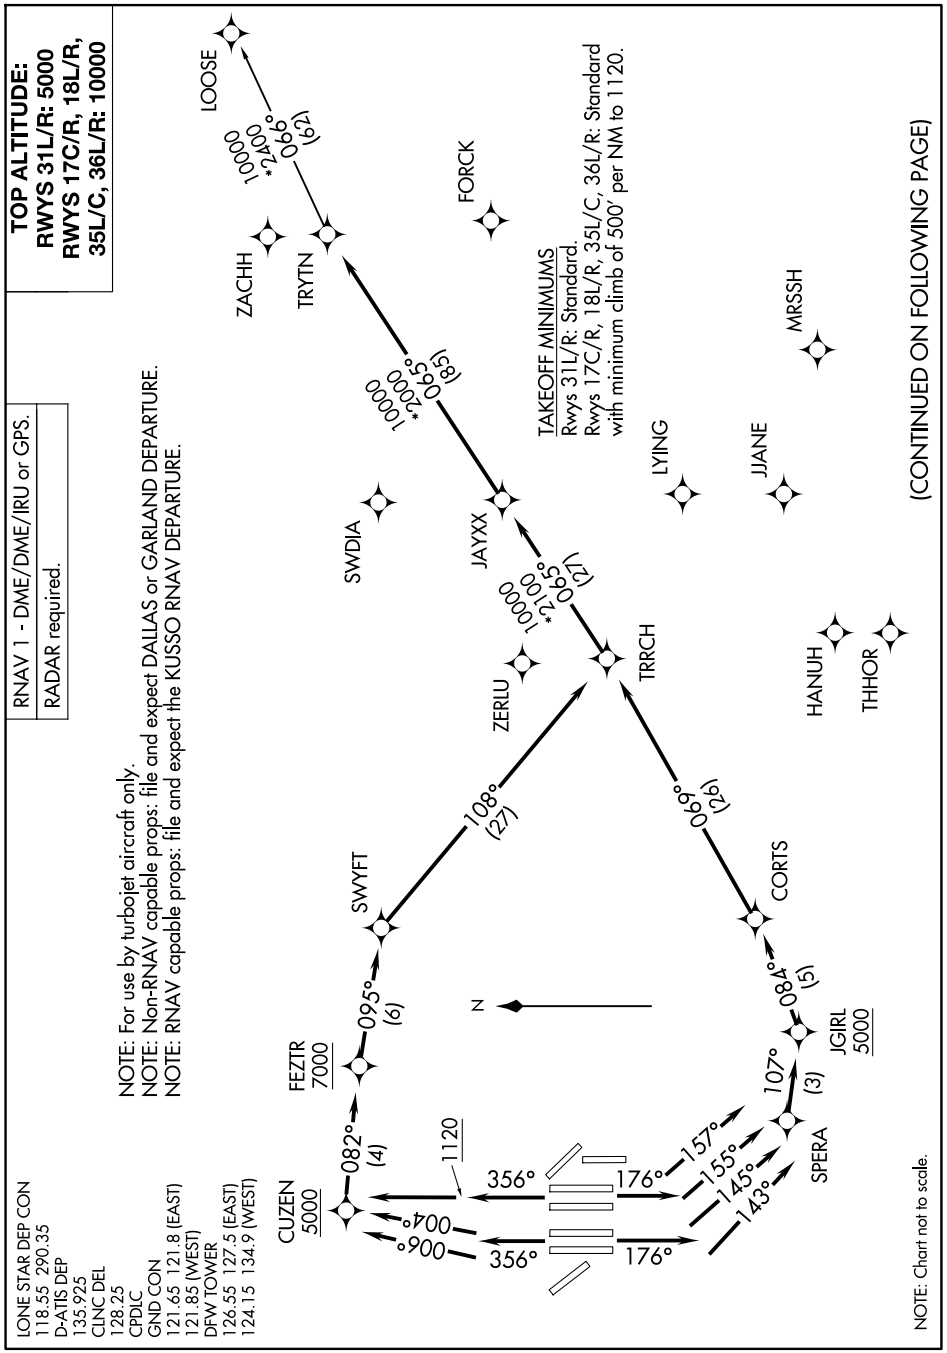
TOP ALTITUDE:
RWYS 31L/R: 5000
RWYS 17C/R, 18L/R,
35L/C, 36L/R: 10000
RNAV 1 - DME/DME/IRU or GPS.
RADAR required.
NOTE: For use by turbojet aircraft only.
NOTE: Non-RNAV capable props: file and expect DALLAS or GARLAND DEPARTURE.
NOTE: RNAV capable props: file and expect the KUSSO RNAV DEPARTURE.
LONE STAR DEP CON
118.55 290.35
D-ATIS DEP
135.925
CLNC DEL
128.25
CPDLC
GND CON
121.65 121.8 (EAST)
121.85 (WEST)
DFW TOWER
126.55 127.5 (EAST)
124.15 134.9 (WEST)
CUZEN
5000
082°
(4)
FEZTR
7000
095°
(6)
SWYFT
108°
(27)
ZERLU
1000
*2100
065°
(12)
JAYXX
1000
*2000
065°
(85)
SWDIA
TRYTN
ZACHH
1000
*2400
099°
(29)
LOOSE
FORCK
TRRCH
069°
(92)
CORTS
080°
(5)
JGIRL
5000
107°
(3)
SPERA
LYING
JJANE
MRSSH
HANUH
THHOR
TAKEOFF MINIMUMS
Rwys 31L/R: Standard.
Rwys 17C/R, 18L/R, 35L/C, 36L/R: Standard with minimum climb of 500′ per NM to 1120.
(CONTINUED ON FOLLOWING PAGE)
N
1120
356°
004°
006°
356°
176°
157°
155°
145°
143°
176°
NOTE: Chart not to scale.