



WAAS CH 70723 W30A	APP CRS 300°	Rwy Idg 4100 TDZE 1222 Apt Elev 1226
--	------------------------	---

RNAV (GPS) RWY 30

POCAHONTAS MUNI (POH)

RNP APCH.	▼ NA Circling NA to Rws 18 and 36. Circling Rwy 12 NA at night. Rwy 30 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Use Algona altimeter setting; when not received, use Fort Dodge altimeter setting: increase LPV all Cats DA to 1536 feet, LNAV/VNAV all Cats DA to 1784 feet; increase all MDA 20 feet and LNAV Cat C visibility $\frac{1}{8}$ SM. Baro-VNAV NA.	MISSED APPROACH: Climb to 3000 direct EVIFI and hold.
-----------	--	---

AXA AWOS-3 118.475	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
------------------------------	--	---------------------------------

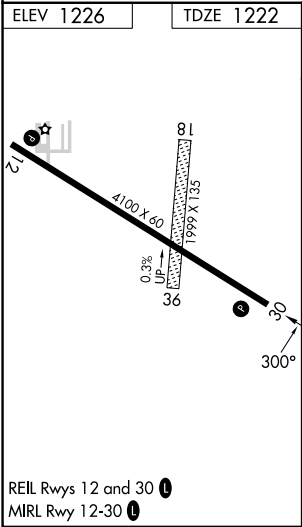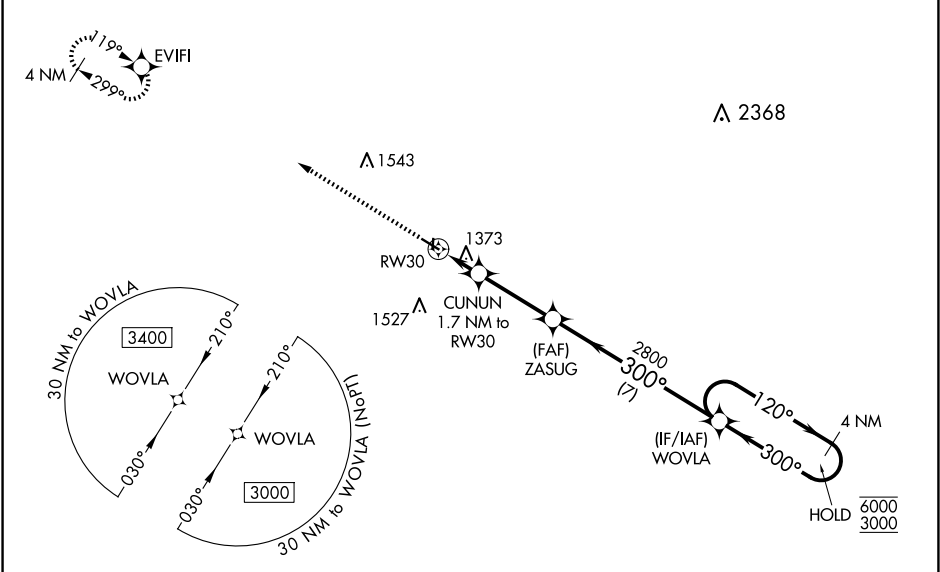

3000	EVIFI	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 40°).			
*LNAV only	CUNUN 1.7 NM to RW30	ZASUG 2800	WOVL A	4 NM Holding Pattern	
	1800*	2800	120°	6000	
	1.7 NM	3.1 NM	7 NM	3000	
				GP 3.00°	
				TCH 45	
CATEGORY	A	B	C	D	
LPV DA	1534-1			312 (400-1)	NA
LNAV/VNAV DA	1782-1 $\frac{5}{8}$			560 (600-1 $\frac{3}{8}$)	NA
LNAV MDA	1740-1		518 (600-1)	1740-1 $\frac{3}{8}$ 518 (600-1 $\frac{3}{8}$)	NA
CIRCLING	1800-1 574 (600-1)	1940-1 714 (800-1)	1940-2 714 (800-2)		NA