


ILS or LOC RWY 35R
ABILENE RGNL (ABI)

MISSED APPROACH: Climb to 3300 then climbing right turn to 4000 direct TOMHI LOM/INT/I-ABI 6.8 DME and hold.

T For inop ALS, increase S-ILS 35R Cat E visibility to RVR 4000,
A NA and S-LOC 35R Cat C/D/E visibility to 1 $\frac{3}{8}$ SM.
****** RVR 1800 authorized with use of FD or AP or HUD to DA.

GND CON
121.7 348.6

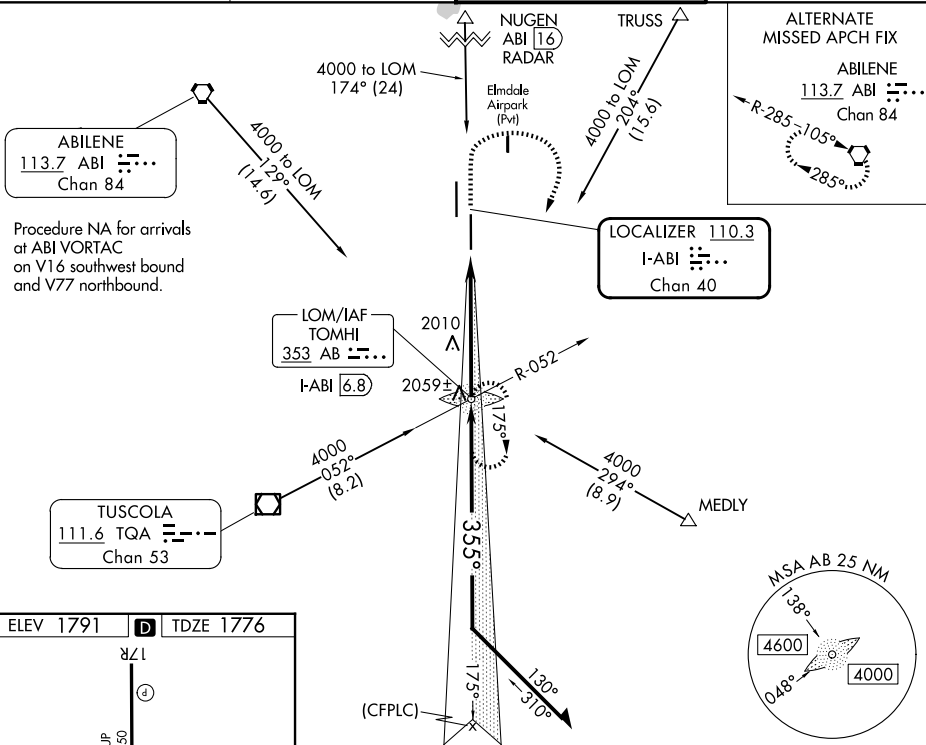

3300 ↑ 4000 ↷ TOMHI TOMHI LOM/INT I-ABI 6.8 3573 175° 4000 355° 3600 GS 3.00° TCH 58 Remain within 15 NM					
*LOC only.					
I-ABI 1.4 I-ABI 2.7 1.3 4.1 NM					
CATEGORY	A	B	C	D	E
S-ILS 35R**	1976/24 200 (200-½)				
S-LOC 35R	2260/24	484 (500-½)	2260/50 484 (500-1)		
CIRCLING	2300-1 509 (600-1)	2320-1 529 (600-1)	2420-1¾ 629 (700-1¾)	2460-2 669 (700-2)	2620-3 829 (900-3)