


TOP ALTITUDE:
8000

RNAV - 1 DME/DME/IRU or GPS.
RADAR required.

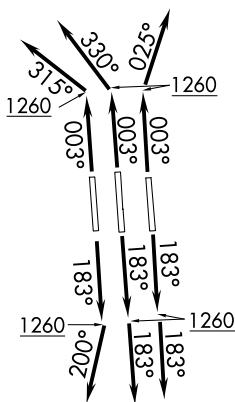



Rwys 18L/C/R, 36C/R: Standard with minimum climb
of 500' per NM to 1260.
Rwy 36L: Standard with minimum climb
of 500' per NM to 1400.

NOTE: For turbo jets only.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.

NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

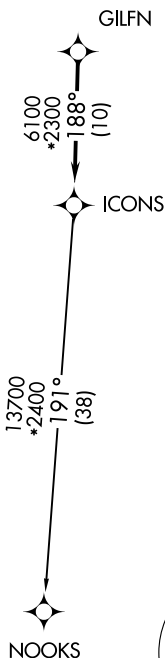

NOTE: Chart not to scale.