
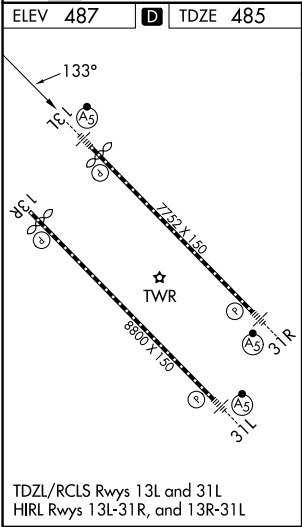


WAAS CH 99723 W13B	APP CRS 133°	Rwy Ldg TDZE 485 Apt Elev 487
--	------------------------	---

RNAV (GPS) Z RWY 13L
DALLAS LOVE FLD (DAL)

RNP APCH.		MALS R	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLDO and hold.
Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.			
D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6

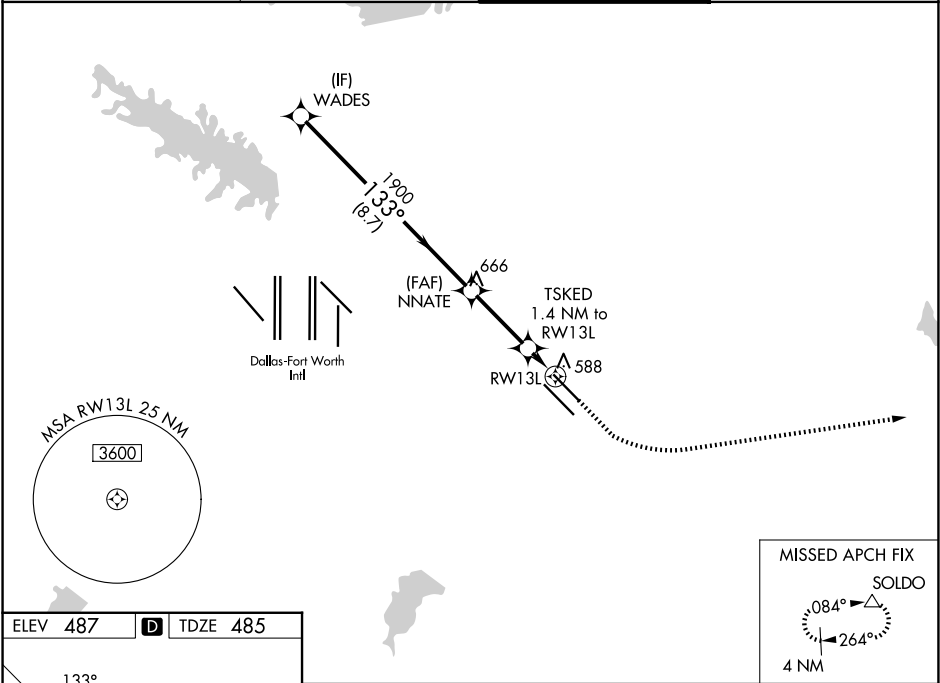

WADES		1000		3000		SOLDO	
2500		NNATE		TSKED		*LNAV only.	
GP 3.00° TCH 55		1900		1.4 NM to RW13L		RW13L	
133°		1900		*980			
8.7 NM		2.9 NM		1.4 NM			
CATEGORY	A	B	C	D			
LPV DA	685/18		200 (200-½)				
LNAV/ VNAV DA	764/24		279 (300-½)				
LNAV MDA	840/24 355 (400-½)		840/30 355 (400-¾)				
CIRCLING	1000-1 513 (600-1)		1140-1 653 (700-1)		1220-2 733 (800-2)		1520-3 1033 (1100-3)

SC-2, 25 DEC 2025 to 22 JAN 2026

SC-2, 25 DEC 2025 to 22 JAN 2026