


LONE STAR DEP CON
126.475 363.15
D-ATIS
120.15
CINC DEL
127.9
CPDLC
GND CON
121.75 348.6
LOVE TOWER
123.7 239.3

TOP ALTITUDE:
RWYS 13L/R: 3000
RWYS 31L/R: 10000

- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: RNAV 1.
- NOTE: For use by turbojet aircraft only.
- NOTE: RNAV-capable props: File and expect the SWABR RNAV SID.
- NOTE: ALIAN Transition: ATC assigned only.
- NOTE: Aircraft landing in Lubbock terminal area file the BRHMA enroute transition.

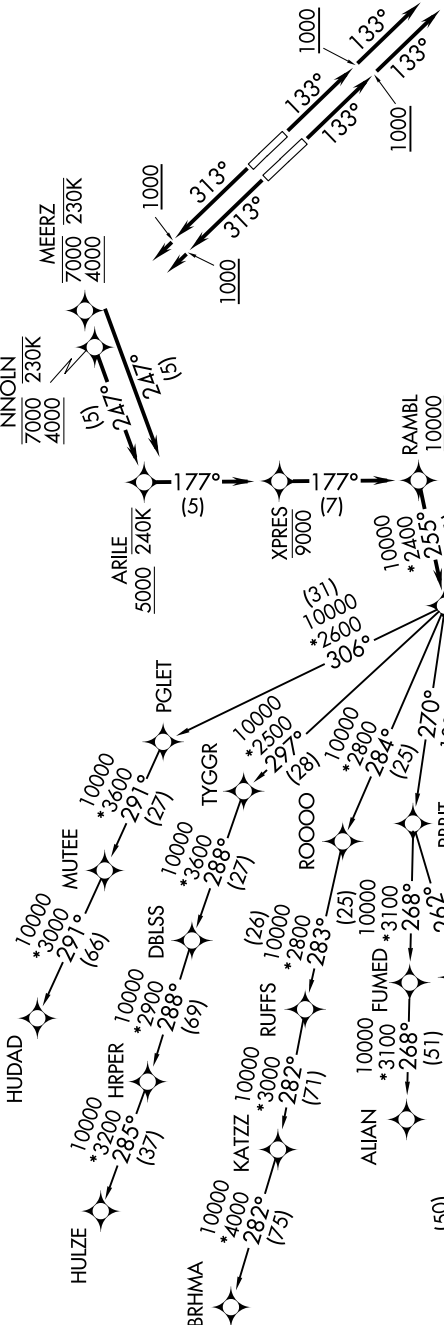

TAKEOFF MINIMUMS
RWys 13L/R: Standard with minimum climb of 500' per NM to 1200.
RWys 31L/R: Standard with minimum climb of 500' per NM to 1200.

NOTE: Chart not to scale.