

LOC/DME I-OYG	APP CRS	Rwy Ldg
111.9	093°	11245
Chan 56		TDZE 673
		Apt Elev 680

ILS or LOC RWY 9C

CHICAGO O'HARE INTL (ORD)

DME or RADAR required. From GIBNS: RNAV 1-GPS required. Aircraft not GPS equipped - RADAR required for procedure entry.



ALSF-2



MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 037° and OBK VOR/DME R-097 to DEERE INT/ OBK 15.6 DME and hold.

Simultaneous approach authorized. For inop ALS, increase S-LOC 09C Cat C/D visibility to 1½ SM.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)	CLNC DEL	CPDLC
135.4		121.15 348.0	124.125	121.75	121.6	
282.225	119.0 292.125		118.05	121.9		
			(TWR NORTH)	(OBND)		
			(TWR SOUTH)	(IBND)		
			(ALL TWRs)			

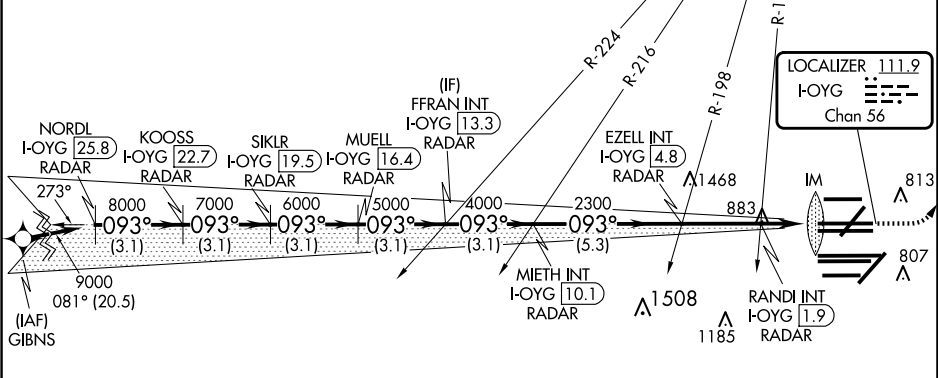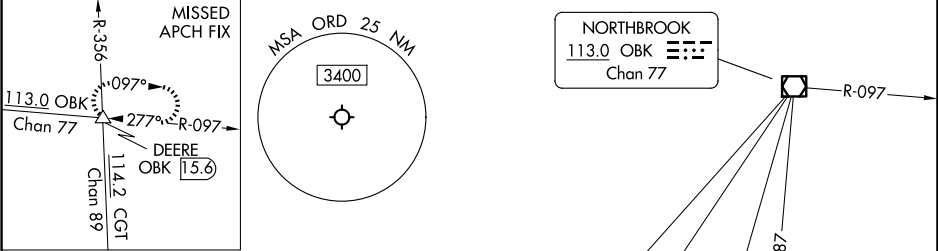

NORDL I-OYG 25.8 RADAR	KOOSS I-OYG 22.7 RADAR	SIKLR I-OYG 19.5 RADAR	MUELL I-OYG 16.4 RADAR	FFRAN INT I-OYG 13.3 RADAR	EZELL INT I-OYG 4.8 RADAR	RANDI INT I-OYG 1.9 RADAR	DEERE
9000	8000	7000	6000	5000	4000	2300	
093°	093°	093°	093°	093°	093°	093°	
081° (20.5)							
GS 3.00° TCH 55							
3.1 NM	3.1 NM	3.1 NM	3.1 NM	3.1 NM	5.3 NM	2.8 NM	0.7 NM
1.1 NM	0.1 NM						
CATEGORY	A	B	C	D			
S-ILS 9C	873/18 200 (200-½)						
S-LOC 9C	1140/24	467 (500-½)	1140/50	467 (500-1)			

