

RNAV (GPS) RWY 9R  
CHICAGO O'HARE INTL (ORD)

**Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. For inop ALS, increase LNAV Cats C/D visibility to 1 3/4 SM.**

**MISSED APPROACH:**  
Climb to 4000 direct  
GRABL and hold.

9000  
082° (20.4)

8000  
093° (3.1)

ADLMN

7000  
(3.1)

FOTTR

6000  
(3.1)

WASCO

5000  
(3.1)

GEMMS  
230K

4000  
(3.1)

CHILR  
230K

DEVON

2300  
093° (5.3)

1468

883  
RW09R

813

807

1508

1185

(FAF) MEOWW 2.1 NM to RW09R

MSA RW09R 25 NM

3400


MISSED APCH FIX  
4 NM

093°

273°

GRABL

|          |   |          |
|----------|---|----------|
| ELEV 680 | D | TDZE 668 |
| 093°     |   |          |

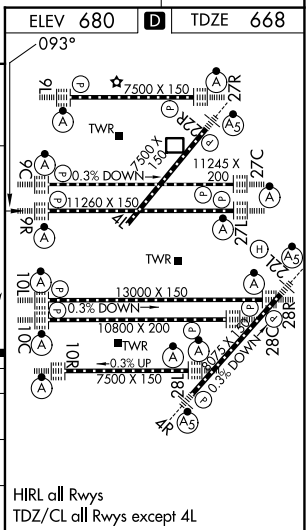

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026