


WAAS CH 93839 W28E	APP CRS 275°	Rwy Ldg TDZE 667 Apt Elev 680
--	------------------------	---

RNAV (GPS) Y RWY 28L

CHICAGO O'HARE INTL (ORD)

RNP APCH		ALSF-2		MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.	
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations.					
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON (TWR CENTER) 121.75 (OBND) (TWR SOUTH) 121.9 (IBND) 226.675 (ALL TWRs)	CLNC DEL 121.6	CPDLC

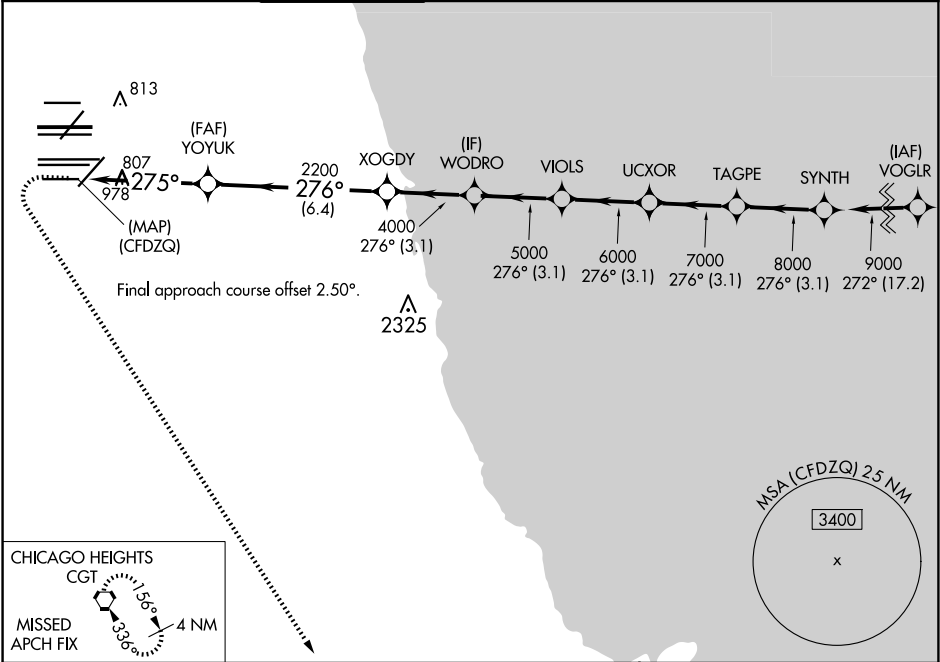

1200		4000		CGT		SYNTH					
* LNAV only											
CATEGORY		A		B		C		D			
LPV DA				917/24		250 (300-½)					
LNAV/VNAV DA				1090/40		423 (500-¾)					
LNAV MDA		1060/24		393 (400-½)		1060/35		393 (400-⅝)			

