


ILS Z or LOC Z RWY 27
HELENA RGNL (HLN)

MISSED APPROACH: Climb to 4700 then climbing right turn to 9300 on heading 021° and on HLN VORTAC R-340 to WOKEN INT and hold, continue climb-in-hold to 9300.

#Missed approach requires minimum climb of 300 feet per NM to 6000; if unable to meet climb gradient, see ILS Y or LOC Y RWY 27.

V Circling NA to Rwy 10 and 28. Circling Rwy 5, 23, 35 NA at night. Inop
A table does not apply to S-LOC 27 all Cats. For Inop ALS, increase S-ILS 27
***** Cat E visibility to ¾ mile, increase OROYN fix minimums: S-LOC 27 Cat C/
 D/E visibility to 2 miles. Circling NA for Cats D and E south of Rwy 9-27.
 -16°C Holding at HAU NDB authorized for Cat A and B aircraft only. *DME from
 HLN VORTAC. DME use requires simultaneous reception of HLN and HLN DME

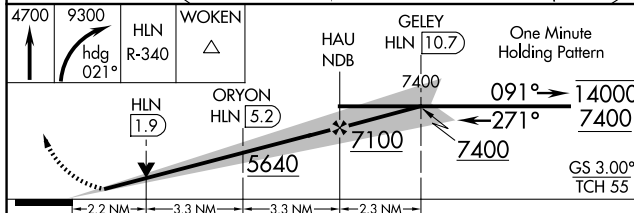

REIL Rwys 9, 17 and 35 **L**
MIRL Rwys 5-23 and 17-35 **L**
HIRL Rwy 9-27 **L**

FAF to MAP 8.7 NM					
Knots	60	90	120	150	180
Min:Sec	8:42	5:48	4:21	3:29	2:54

NW-1, 25 DEC 2025 to 22 JAN 2026