LUFKIN FOUR DEPARTURE

HOUSTON DEP CON
134.45 284.0
ATIS
135.575 269.9
GND CON
121.6 275.8
ELLINGTON TOWER
126.05 253.5

TOP ALTITUDE: ASSIGNED BY ATC

RADAR and DME required.

NOTE: For aircraft destined LIT or overflying LIT or PXV.

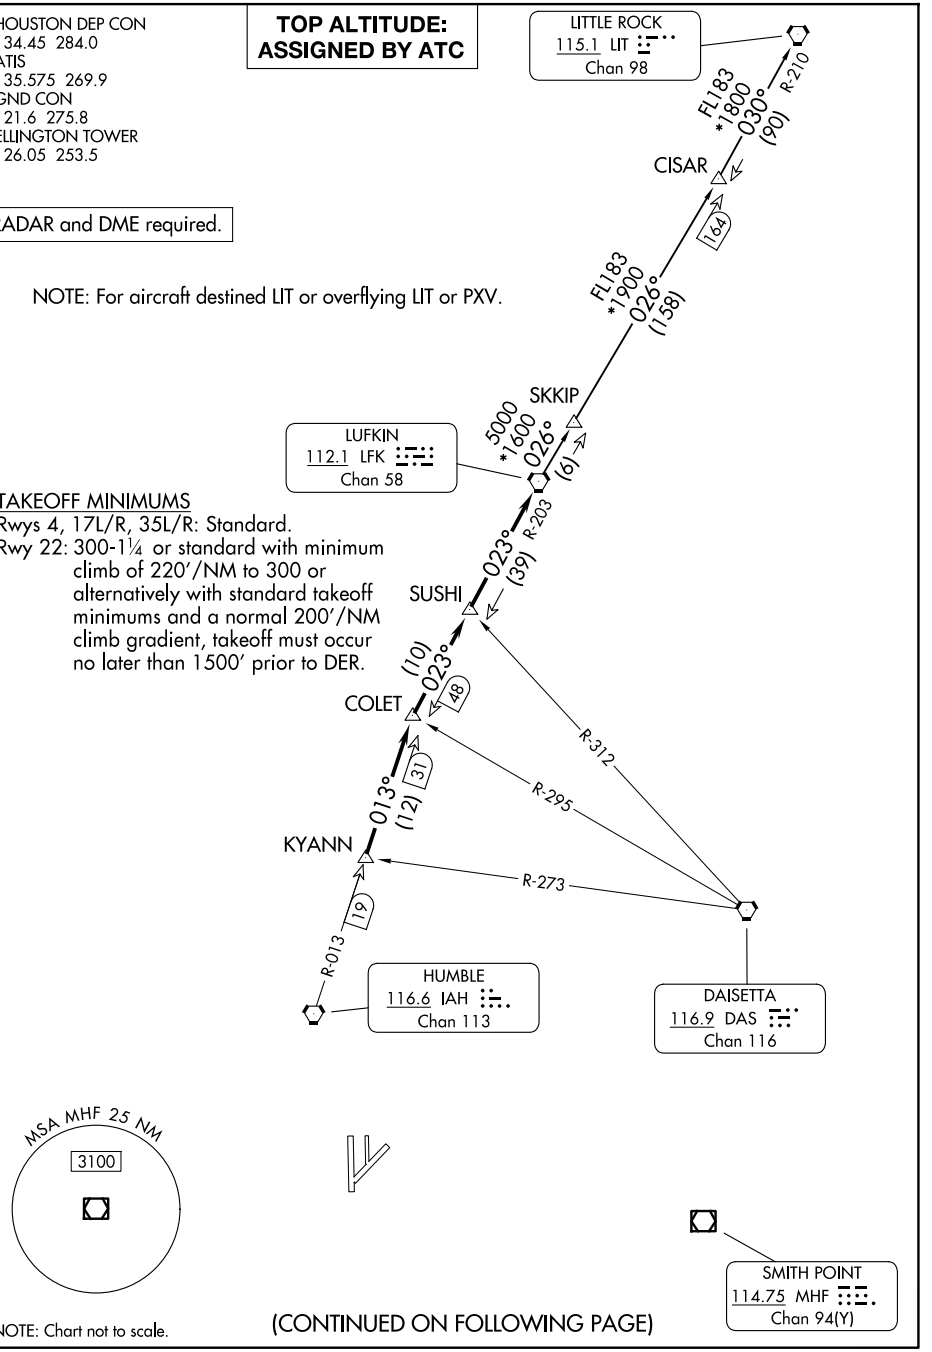

TAKEOFF MINIMUMS
Rwys 4, 17L/R, 35L/R: Standard.
Rwy 22: 300-1¼ or standard with minimum climb of 220′/NM to 300 or alternatively with standard takeoff minimums and a normal 200′/NM climb gradient, takeoff must occur no later than 1500′ prior to DER.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)