

# HOOSIER FIVE DEPARTURE

AL-203 (FAA)

INDIANAPOLIS INTL (IND)  
INDIANAPOLIS, INDIANA

D-ATIS 134.25  
 CLNC DEL  
 128.75 251.1  
 CPDLC  
 GND CON  
 121.9  
 INDY TOWER  
 120.9 251.1  
 INDIANAPOLIS DEP CON  
 124.95 317.8 (EAST)  
 119.05 317.8 (WEST)

**TOP ALTITUDE:**  
**(JETS) 5000**  
**(PROPS) 3000**

BRICKYARD  
 116.3 VHP  
 Chan 110

LOCALIZER  
 111.75 I-UZK  
 Chan 54(Y)

I-OQV  
 0.3

LOCALIZER  
 111.15 I-OQV  
 Chan 48(Y)


LOCALIZER  
 111.15 I-FVJ  
 Chan 48(Y)

HOOSIER  
 110.2 OOM  
 Chan 39

I-UZK  
 2.6

I-FVJ  
 2.3

POCKET CITY  
 113.3 PXV  
 Chan 80

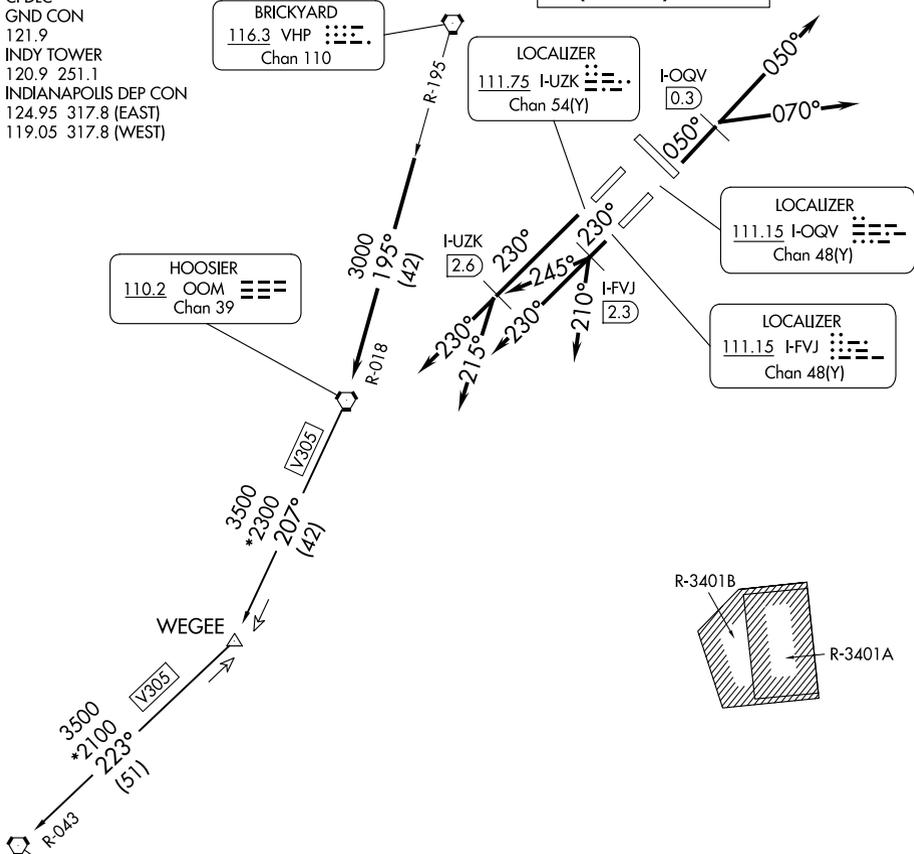

TAKEOFF MINIMUMS:  
 Rwy 5L/R, 14, 23L/R, 32: Standard.

(NARRATIVE ON FOLLOWING PAGE)

- NOTE: RADAR required.
- NOTE: Select appropriate localizer/DME frequency/channel prior to departure.
- NOTE: Turbojets accelerate to 250K until reaching 10000, if unable advise ATC.
- NOTE: Assigned to aircraft with a requested altitude of 11000 or above.

NOTE: Chart not to scale.

EC-2, 25 DEC 2025 to 22 JAN 2026

EC-2, 25 DEC 2025 to 22 JAN 2026