

WAAS CH 72809 W18A	APP CRS 180°	Rwy Ldg 8536 TDZE 653 Apt Elev 655
--	------------------------	---

RNAV (GPS) RWY 18

LA CROSSE RGNL (LSE)

RNP APCH - GPS.



V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use ONA altimeter setting and increase LPV DA to 907 feet; increase LNAV/VNAV DA to 1174 feet; **A** increase all MDAs 60 feet and Circling visibility Cat B ¼ SM. For inop ALS, **☼** -21°C increase LNAV/VNAV all Cats visibility to 1 ½ SM, and LNAV Cats C and D to 1 ¾ SM. Baro-VNAV and VDP NA when using ONA altimeter setting.

MALSR



MISSED APPROACH:
Climb to 3000 direct
PKRNA and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

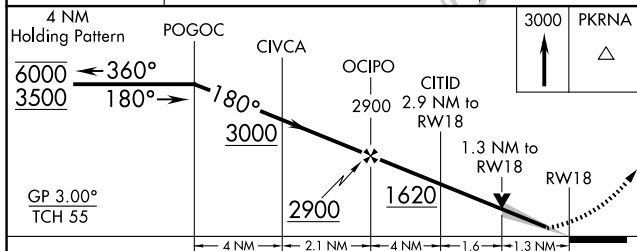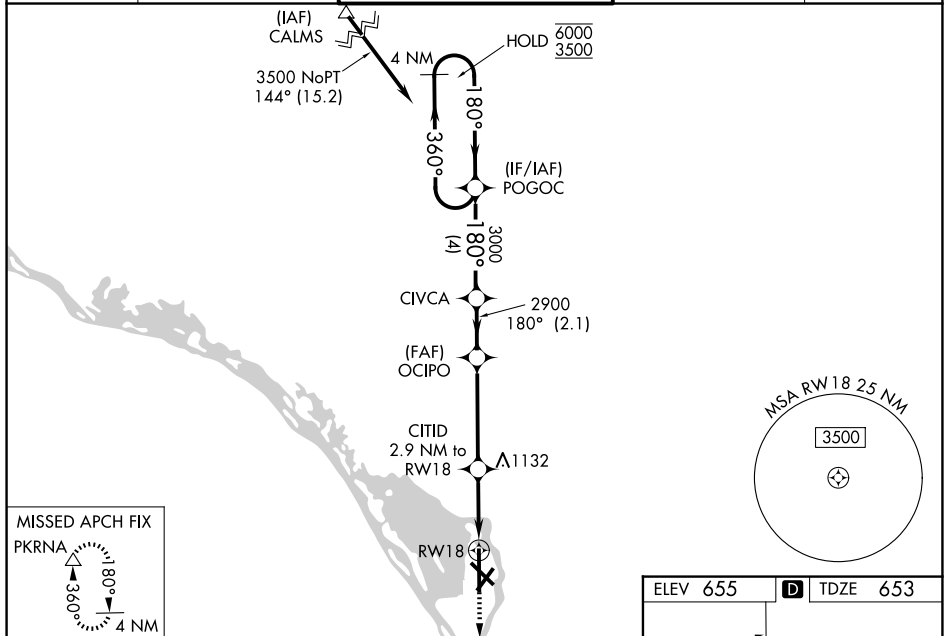

CATEGORY	A	B	C	D
LPV DA	853-½ 200 (200-½)			
LNAV/ VNAV DA	1120-1 467 (500-1)			
LNAV MDA	1120-½ 467 (500-½)		1120-1 467 (500-1)	
CIRCLING	1140-1 485 (500-1)	1460-1 805 (900-1)	1760-3 1105 (1200-3)	1820-3 1165 (1200-3)

