

WAAS CH 53507 W25A	APP CRS 251°	Rwy Ldg 11095 TDZE 104 Apt Elev 128
--	------------------------	--

RNAV (GPS) Y RWY 25L

LOS ANGELES INTL (LAX)


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C. Simultaneous approach authorized. Simultaneous approach authorized with HHR 25. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500, LNAV Cat C/D visibility to 1½ SM. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 2000 direct ZERAN and on track 187° to CATLY and hold.

D-ATIS 133.8	SOCAL APP CON 124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	LOS ANGELES TOWER 133.9 239.3 (N) 120.95 379.1 (S)	GND CON 121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)
------------------------	---	--	---

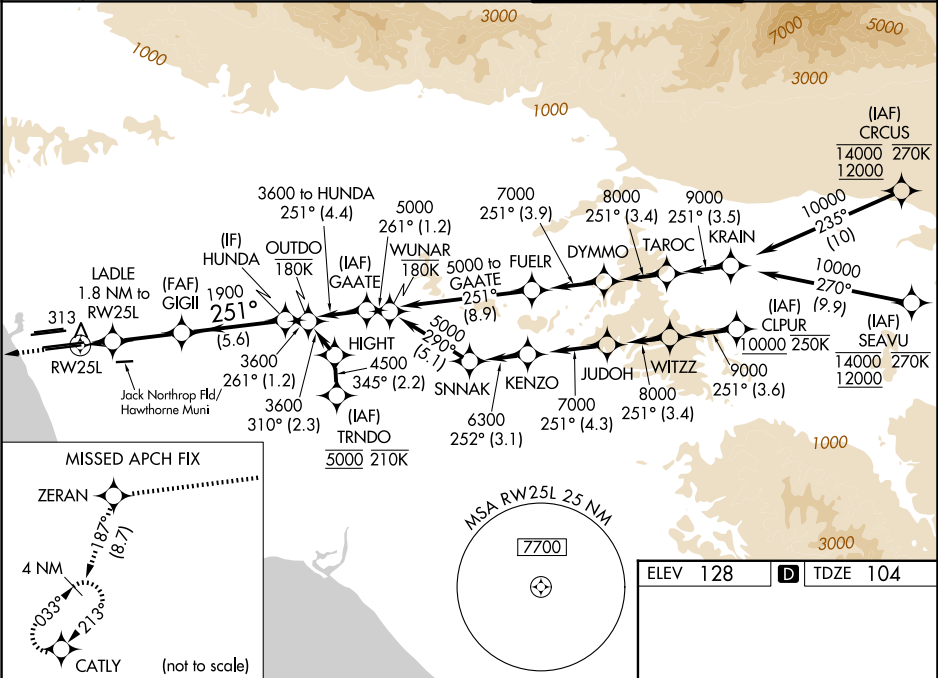

2000

ZERAN

tr 187°

CATLY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

LADLE

1.8 NM to RW25L

RW25L

GIGII

1900

HUNDA

3600

251°

700

1900

GP 3.00°

TCH 54

1.8

3.7 NM

5.6 NM

CATEGORY	A	B	C	D
LPV DA		304/18	200 (200-½)	
LNAV/VNAV DA		479/35	375 (400-¾)	
LNAV MDA	580/24	476 (500-½)	580/50	476 (500-1)

ELEV 128

D

TDZE 104

TDZ/CL Rwy's 6R, 7L, 24R, and 25L
HIRL all Rwy's