


LOC/DME I-BNA 109.9 Chan 36	APP CRS 021°	Rwy Ldg TDZE Apt Elev 7702 599 599
---	------------------------	--


ILS or LOC RWY 2L
NASHVILLE INTL (BNA)

DME or RADAR required. RADAR required for procedure entry.	ALSF-2	MISSED APPROACH: Climb to 1200 then climbing left turn to 4000 on heading 240° and on BNA VORTAC R-270 to BEVEE/BNA VORTAC 22.4 DME/RADAR and hold.
Simultaneous approach authorized.		

D-ATIS 135.1	NASHVILLE APP CON 118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	NASHVILLE TOWER 118.6 257.8	GND CON 121.9 348.6
------------------------	--	---------------------------------------	-------------------------------

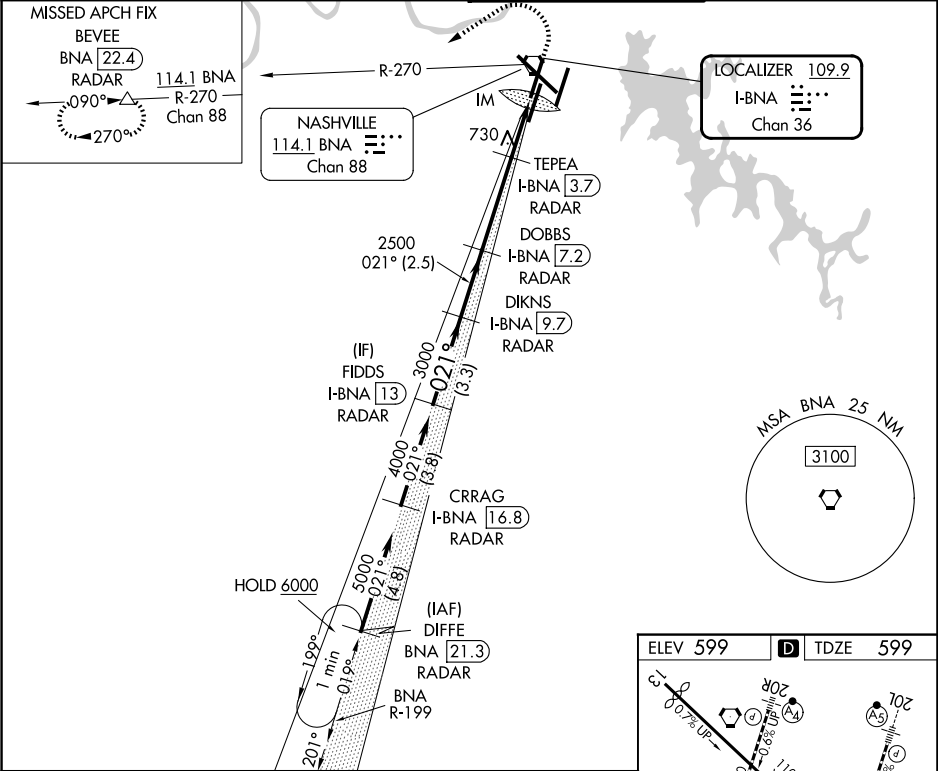

	FIDDS I-BNA 13 RADAR	DIKNS I-BNA 9.7 RADAR	DOBBS I-BNA 7.2 RADAR	TEPEA I-BNA 3.7 RADAR	BNA R-270 I-BNA 2.5 I-BNA 1.4	BEVEE △
	4000	3000	2500	1380	2500	
	GS 3.00° TCH 55					
CATEGORY	A	B	C	D		
S-ILS 2L		799/18	200 (200-½)			
S-LOC 2L	980/24	381 (400-½)	980/35	381 (400-¾)		
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)		

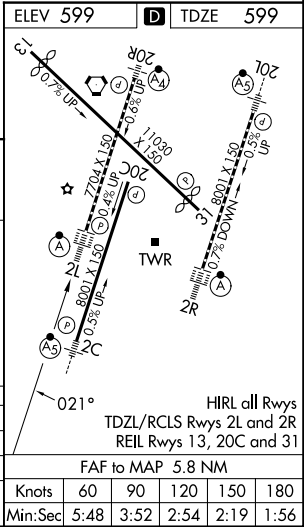

SE-1, 25 DEC 2025 to 22 JAN 2026

SE-1, 25 DEC 2025 to 22 JAN 2026