


WAAS CH 50222 W05A	APP CRS 047°	Rwy Ldg TDZE Apt Elev	7809 26 27
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) Z RWY 5
NORFOLK INTL (ORF)

RNP APCH.	MALS	MISSED APPROACH:
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to RVR 6000. **RVR 1800 authorized with use of FD or AP or HUD to DA.		Climb to 2000 direct TECHI then on track 023° to OUTLA and hold.

ATIS 127.15	NORFOLK APP CON 118.9 353.7	NORFOLK TOWER 120.8 257.8	GND CON 121.9
-----------------------	---------------------------------------	-------------------------------------	-------------------------

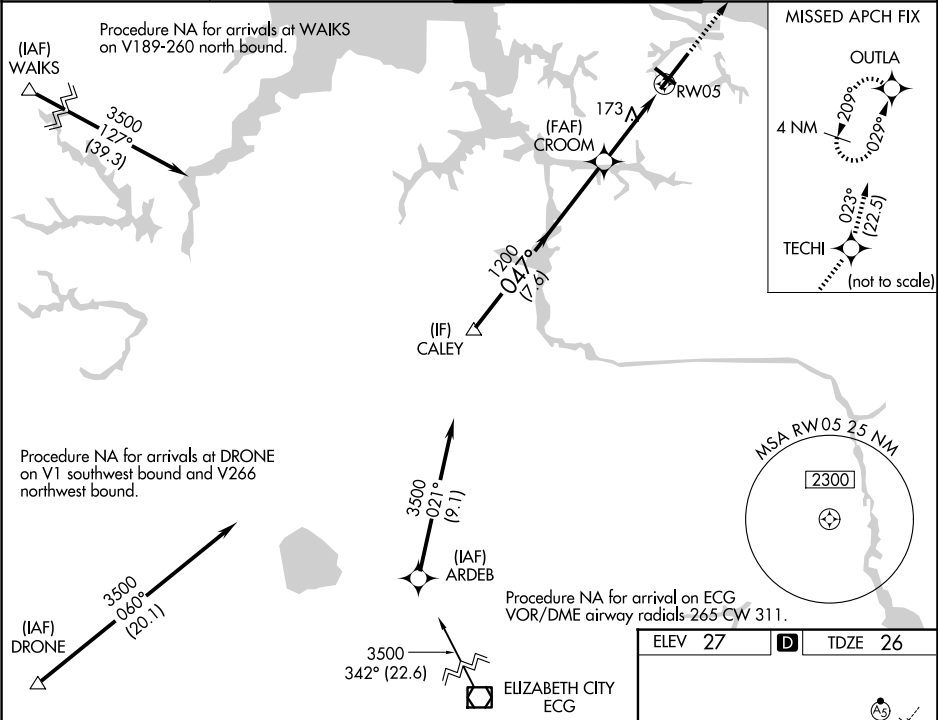

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).				2000	TECHI	tr 023°	OUTLA
3500				* LNAV only.			
GP 3.00° TCH 56				* 1.1 NM to RW05			
7.6 NM				2.4 NM			
1.1 NM							
CATEGORY	A	B	C	D			
LPV DA**	226/24			200 (200-½)			
LNAV/VNAV DA	306/24			280 (300-½)			
LNAV MDA	440/24		414 (500-½)	440/40	414 (500-¾)		
CIRCLING	480-1 453 (500-1)	540-1 513 (600-1)	540-1½ 513 (600-½)	900-2¾ 873 (900-2¾)			

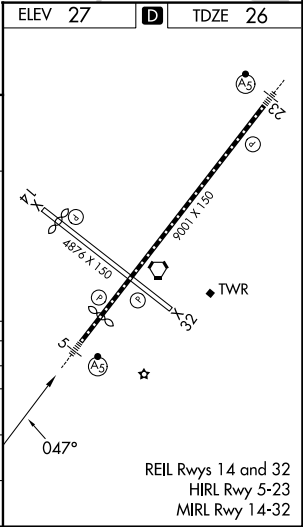

NE-3, 25 DEC 2025 to 22 JAN 2026

NE-3, 25 DEC 2025 to 22 JAN 2026