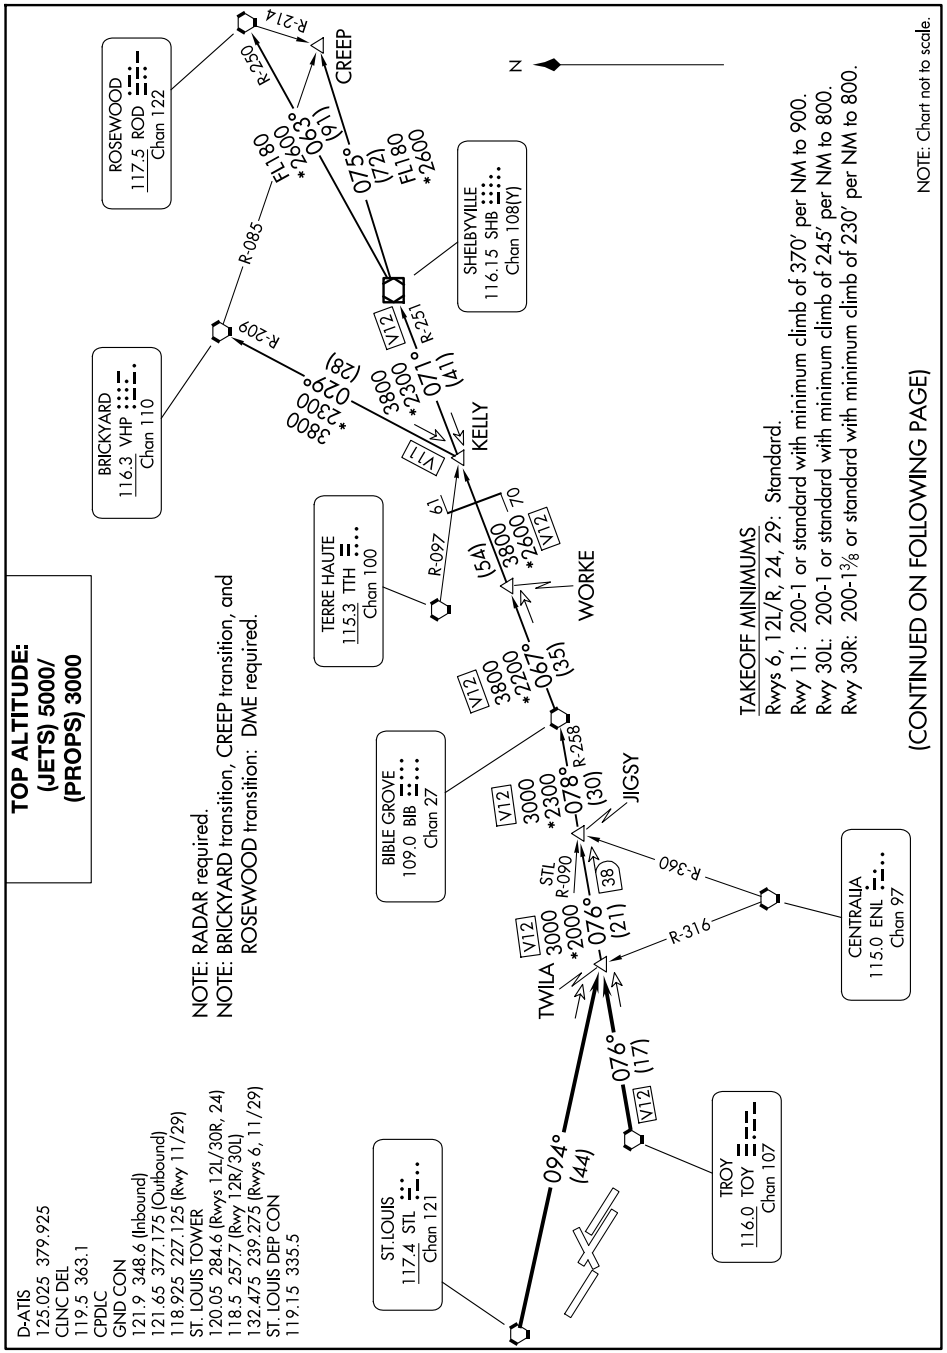
TOP ALTITUDE:
(JETS) 5000/
(PROPS) 3000
NOTE: RADAR required.
NOTE: BRICKYARD transition, CREEP transition, and ROSEWOOD transition: DME required.
D-ATIS 125.025 379.925
CLNC DEL 119.5 363.1
CPDLC
GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)
ST. LOUIS TOWER 120.05 284.6 (Rwys 12L/30R, 24) 118.5 257.7 (Rwy 12R/30L) 132.475 239.275 (Rwys 6, 11/29)
ST. LOUIS DEP CON 119.15 335.5
ROSEWOOD 117.5 ROD Chan 122
BRICKYARD 116.3 VHP Chan 110
TERRE HAUTE 115.3 TTH Chan 100
BIBLE GROVE 109.0 BIB Chan 27
ST.LOUIS 117.4 STL Chan 121
SHELBYVILLE 116.15 SHB Chan 108(Y)
CENTRALIA 115.0 ENL Chan 97
TROY 116.0 TOY Chan 107
CREEP
KELLY
WORKE
JIGSY
TWILA
STL
R-214
R-255
R-085
R-209
R-251
R-097
R-258
R-090
R-360
R-316
V12
V11
38
N
NOTE: Chart not to scale.
TAKEOFF MINIMUMS
Rwys 6, 12L/R, 24, 29: Standard.
Rwy 11: 200-1 or standard with minimum climb of 370' per NM to 900.
Rwy 30L: 200-1 or standard with minimum climb of 245' per NM to 800.
Rwy 30R: 200-1⅜ or standard with minimum climb of 230' per NM to 800.
(CONTINUED ON FOLLOWING PAGE)