

VORTAC SLN <u>117.1</u> Chan 118	APP CRS 183°	Rwy Ldg 12300 TDZE 1246 Apt Elev 1288
---	------------------------	--


VOR RWY 17
SALINA RGNL (SLN)

T Inoperative table does not apply to Cat C/D/E.
A Circling NA for Cat D/E southwest of Rwy 12-30.
ADF required.

MALS

MISSED APPROACH: Climb to 3400 direct SL LOM and hold.

ATIS 120.15	KANSAS CITY CENTER 134.9 363.2	SALINA TOWER ★ 119.3 (CTAF) 0 257.7	GND CON 121.9 360.8	UNICOM 122.95
----------------	-----------------------------------	--	------------------------	------------------

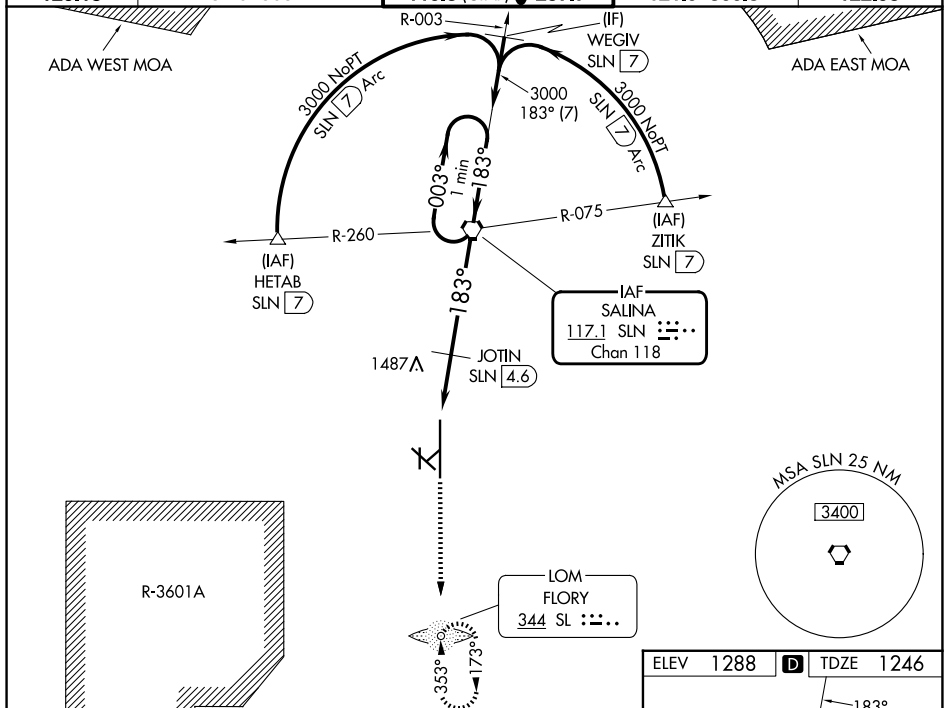

3400 SL

SLN VORTAC One Minute Holding Pattern

JOTIN SLN 4.6

SLN 7

183°

003°

183°

3000

1860*

*1960 when using McPherson altimeter setting.

	1.5 NM	1 NM	4.6 NM			
CATEGORY	A		B	C	D	E
S-17	1860-¾	614 (600-¾)	1860-1¾ 614 (600-1¾)	1860-2 614 (600-2)	1860-2¼ 614 (600-2¼)	
CIRCLING	1860-1	572 (600-1)	1860-1¾ 572 (600-1¾)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)	
JOTIN FIX MINIMUMS						
S-17	1760-¾	514 (500-¾)	1760-1½ 514 (500-1½)	1760-1¾	514 (500-1¾)	
CIRCLING	1820-1 532 (600-1)	1840-1 552 (600-1)	1860-1½ 572 (600-1½)	1860-2 572 (600-2)	1920-2¼ 632 (700-2¼)	

