
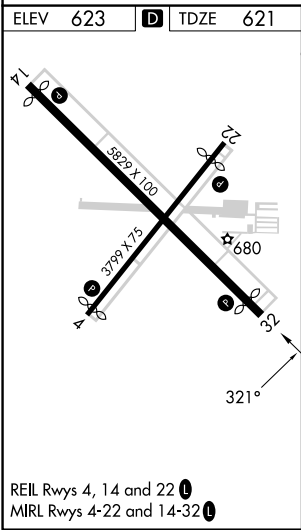


WAAS CH 70524 W32A	APP CRS 321°	Rwy Idg TDZE Apt Elev	4927 621 623
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32
TOLEDO EXEC (TDZ)

RNP APCH. ▼ ▲ Circling Rwy 14 NA at night. Baro-VNAV NA when using Toledo Express altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Toledo Express altimeter setting and increase LPV DA to 914, LNAV/VNAV to 1123, increase LPV all Cats visibility ⅛ SM. Increase all MDA 60 feet and increase LNAV Cats C and D and Circling Cat D visibility ¼ SM.	MISSED APPROACH: Climb to 1100 then climbing left turn to 2300 direct WIMLU and hold.
--	---

ASOS 121.575	TOLEDO APP CON 126.1 307.0	CLNC DEL 125.6	UNICOM 123.05 (CTAF) 1
------------------------	--------------------------------------	--------------------------	---

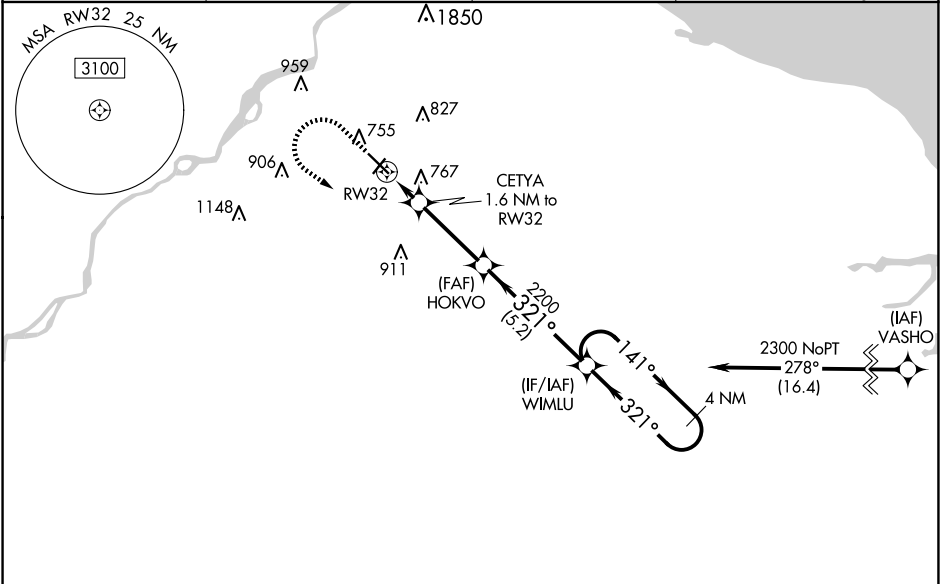

1100 2300 WIMLU		1160* 1.6 NM to RW32 2200 3.2 NM 2200 5.2 NM HOKVO 2200 WIMLU 4 NM Holding Pattern 141° 321° 2300 GP 3.00° TCH 45			
*LNAV only.					
CATEGORY	A	B	C	D	
LPV DA	871-¾ 250 (300-¾)				
LNAV/VNAV DA	1080-1¾ 459 (500-1¾)				
LNAV MDA	1020-1 399 (400-1)		1020-1½ 399 (400-1½)		
CIRCLING	1080-1 457 (500-1)	1100-1 477 (500-1)	1200-1½ 577 (600-1½)	1320-2¼ 697 (700-2¼)	