

WAAS CH 69411	APP CRS 298°	Rwy Ldg TDZE 22
W30A		Apt Elev 24

RNAV (GPS) RWY 30L


VERO BEACH RGNL (VRB)

⚠


Circling to Rwy 30R NA at night. Baro-VNAV NA when using Fort Pierce altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA when using Fort Pierce altimeter setting. When local altimeter setting not received, use Fort Pierce altimeter setting and increase all DA 23 feet and all MDA 40 feet and increase LNAV/VNAV all Cats visibility 1/8 mile LNAV Cats C/D and Circling visibility Cats C/D 1/4 mile.

MISSED APPROACH:
Climb to 2000 direct
HOCKI and hold.

ATIS 120.575	PALM BEACH APP CON 123.625 225.4(N)	VERO BEACH TOWER ★ 126.3 (CTAF) 0	GND CON 127.45	UNICOM 122.95
------------------------	---	---	--------------------------	-------------------------

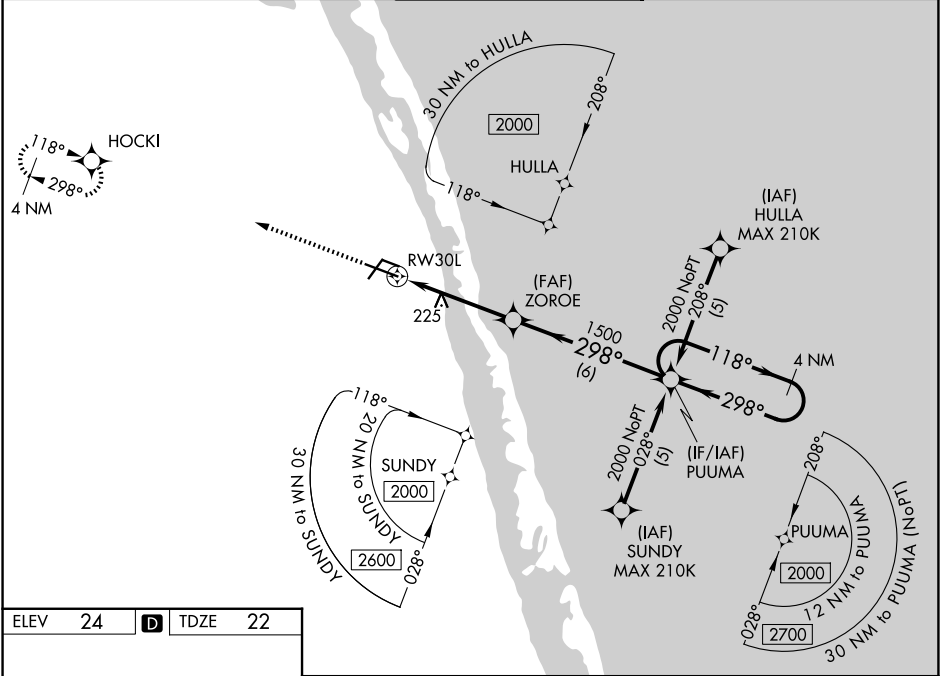

ELEV 24	D	TDZE 22
---------	---	---------

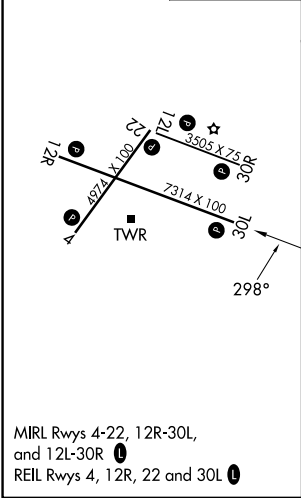

2000

↑

HOCKI

✧

*LNAV only.

RW30L

1.5 NM

3 NM

6 NM

1.5 NM to RW30L

ZOROE

1500

298°

1500

PUUMA

4 NM Holding Pattern

118° →

← 298°

2000

GP 3.00°

TCH 58

CATEGORY	A		B		C	D
LPV DA	222-3 ³ / ₄		200 (200-3 ³ / ₄)			
LNAV/VNAV DA	346-1		324 (400-1)			
LNAV MDA	540-1	518 (600-1)	540-1 ³ / ₈		518 (600-1 ³ / ₈)	
CIRCLING	560-1	536 (600-1)	660-1 ³ / ₄ 636 (700-1 ³ / ₄)		820-2 ¹ / ₂ 796 (800-2 ¹ / ₂)	

SE-3, 25 DEC 2025 to 22 JAN 2026

SE-3, 25 DEC 2025 to 22 JAN 2026