
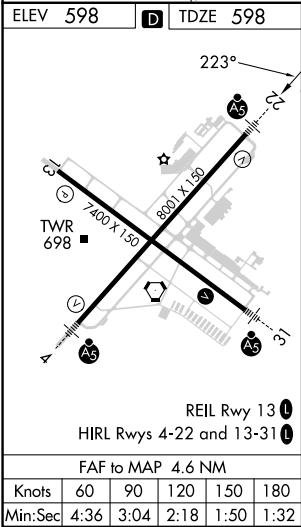


LOC I-LQY	APP CRS	Rwy Ldg	8001
111.7	223°	TDZE	598
		Apt Elev	598

ILS or LOC RWY 22
ABRAHAM LINCOLN CAPITAL (SPI)

ADF or RADAR required for procedure entry. DME required.		MALSR	MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 on heading 250° and on SPI VORTAC R-235 to CUBVO/SPI 12 DME and hold.
VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase S-ILS 22 DA to 856 feet; increase all MDAs 60 feet and S-LOC 22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM.		ASR	

ATIS	SAINT LOUIS APP CON *	SPRINGFIELD TOWER *	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

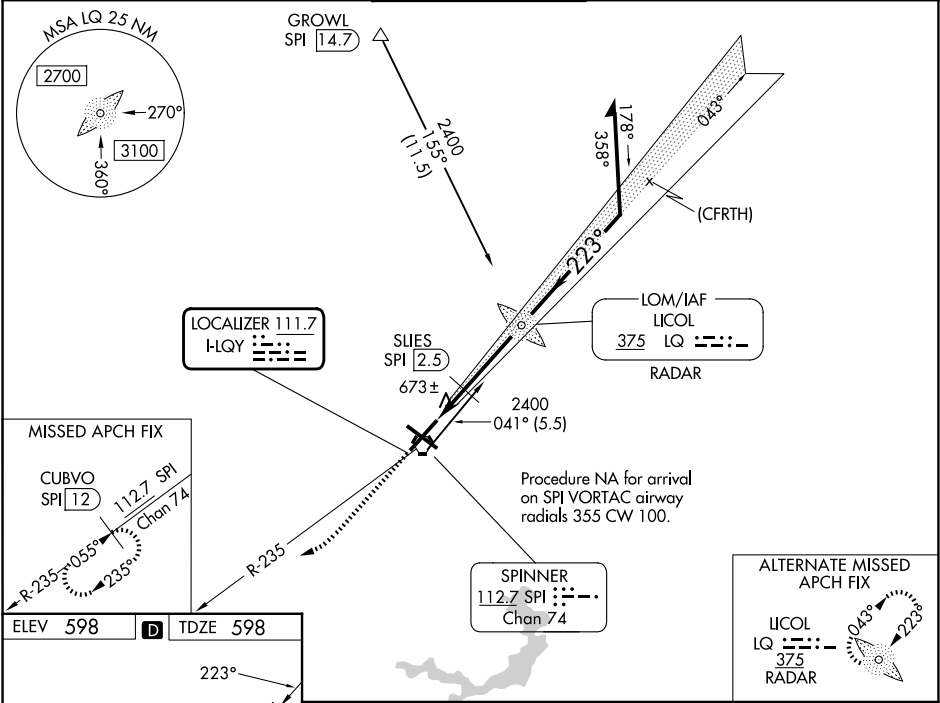

1500 2700 hdg 250°		SPI R-235	CUBVO SPI 12	LQ LOM LICOL RADAR	Remain within 10 NM
2119		043°	2400	223°	2400
1140		1.5 NM	3.1 NM	GS 3.00° TCH 54	
CATEGORY	A	B	C	D	
S-ILS 22	798-½ 200 (200-½)				
S-LOC 22	980-½ 382 (400-½)		980-⅝ 382 (400-⅝)		
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)	

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026