


WAAS CH 99616 W13A	APP CRS 128°	Rwy Ldg TDZE Apt Elev	7217 592 598
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13
ABRAHAM LINCOLN CAPITAL (SPI)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting: increase LPV DA to 932 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 1068 feet and all visibilities 1/4 SM; increase all MDAs 60 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM. Rwy 13 helicopter visibility reduction below 3/4 SM NA.	MISSED APPROACH: Climb to 3100 direct CONOX and hold.
-----------------	--	--

ATIS 127.65 270.1	SAINT LOUIS APP CON ★ 126.15 323.0	SPRINGFIELD TOWER ★ 121.3 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--	--	-------------------------------	-------------------------

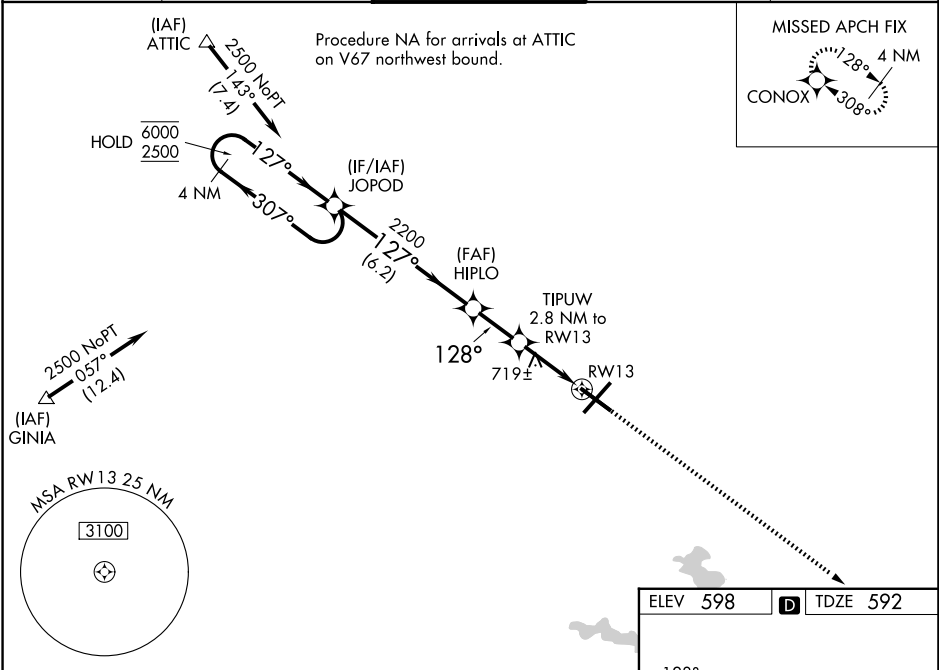

4 NM Holding Pattern		JOPOD		HIPLO		TIPUW 2.8 NM to RW13		3100	CONOX
6000 ← 307° 2500 → 127°				127°		128°		↑	✦
GP 3.00° TCH 50		2200		2200		1520		1.1 NM to RW13	
		6.2 NM		2 NM		1.7 NM		1.1	
CATEGORY	A	B	C	D					
LPV DA	875-7/8 283 (300-7/8)								
LNAV/VNAV DA	1011-1 1/8 419 (500-1 1/8)								
LNAV MDA	980-1 388 (400-1)			980-1 1/8 388 (400-1 1/8)					
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)					

