VOR RWY 22
ABRAHAM LINCOLN CAPITAL (SPI)

VORTAC SPI	APP CRS	Rwy Ldg	8001
112.7	215°	TDZE	598
Chan 74		Apt Elev	598

DME required.

T A ASR — VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting: increase all MDA 60 feet and S-22 visibility Cat C/D ¼ SM, and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-22 Cat C/D visibility to 1⅜ SM. For inop ALS when using AAA altimeter setting, increase S-22 Cat C/D visibility to 1⅝ SM.

MALSR A5

MISSED APPROACH: Climb to 2400 on SPI VORTAC R-215 then right turn direct SPI VORTAC and hold.

ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) L 257.8	121.9 348.6	122.95

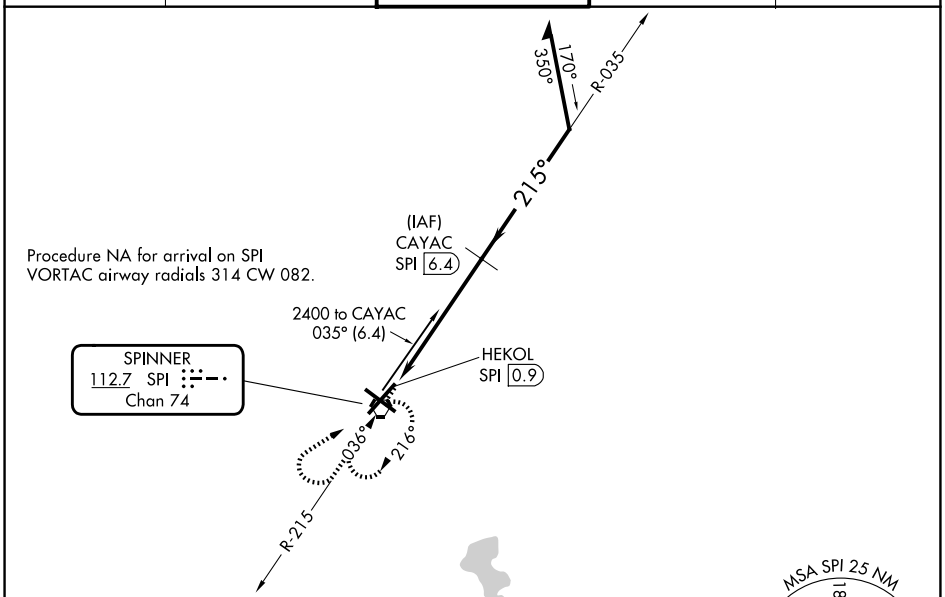

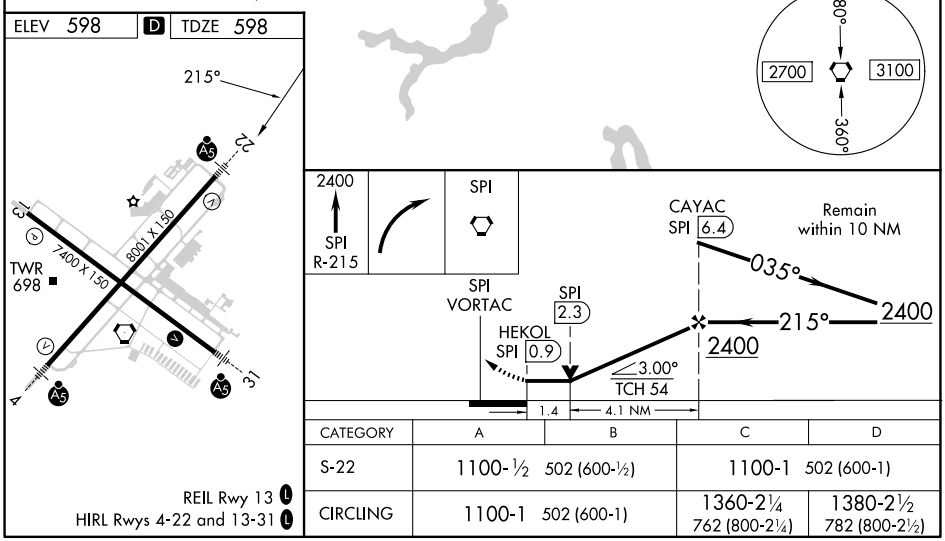

REIL Rwy 13 L
HIRL Rwys 4-22 and 13-31 L

CATEGORY	A	B	C	D
S-22	1100-½ 502 (600-½)		1100-1 502 (600-1)	
CIRCLING	1100-1 502 (600-1)		1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)

EC-3, 25 DEC 2025 to 22 JAN 2026
EC-3, 25 DEC 2025 to 22 JAN 2026