

LOC/DME I-RTS	APP CRS	Rwy Ldg	7800
111.9	318°	TDZE	5045
Chan 56		Api Elev	5050

ILS or LOC RWY 32
RENO/STEAD (RTS)


⚠ Inoperative table does not apply. Procedure NA at night. When local altimeter setting not received, use Reno/Tahoe Intl altimeter setting and increase all DA/MDA 120 feet. VDP NA when using Reno/Tahoe Intl altimeter setting. Circling NA for Cat D southwest of Rwy 14-32.

MALSR




MISSED APPROACH: Climb to 6740 then climbing right turn to 14000 on heading 356° and FMG VORTAC R-314 to HALLE INT/FMG 27 DME and hold, continue climb-in-hold to 14000.

AWOS-3 135.175	NORCAL APP CON 126.3 353.9	UNICOM 122.7 (CTAF)
-------------------	-------------------------------	------------------------

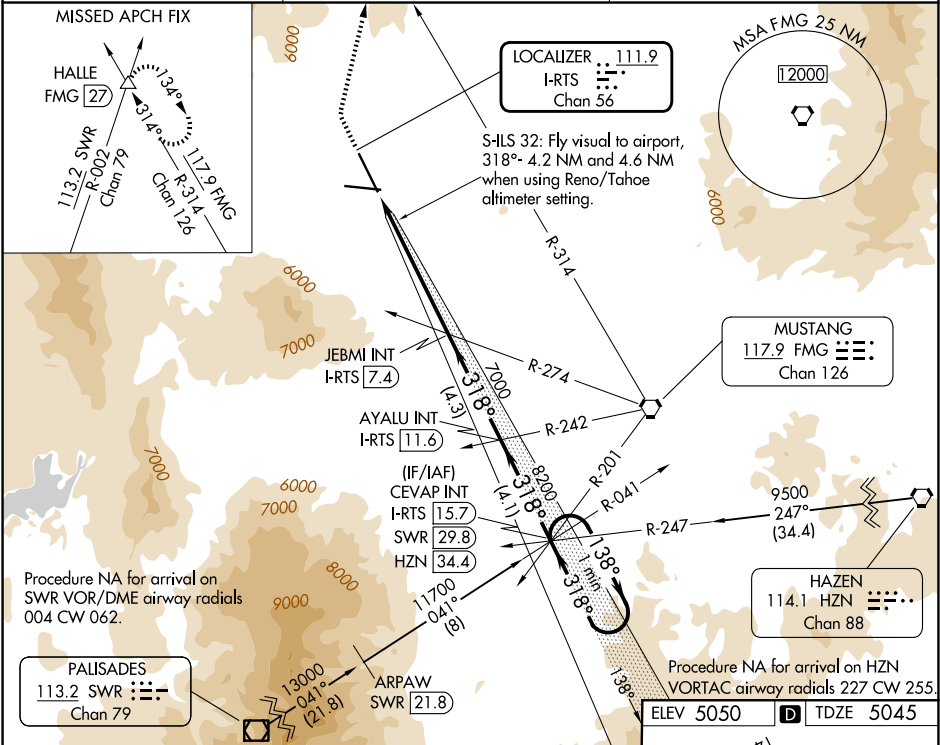

6740	14000	FMG R-314	HALLE	Use I-RTS DME when on the localizer course.
S-ILS 32	FLY VISUAL TO AIRPORT, 318°- 4.2 NM AND 4.6 NM when using Reno/Tahoe altimeter setting.	JEBMI INT I-RTS 7.4	AYALU INT I-RTS 11.6	CEVAP INT I-RTS 15.7 SWR 29.8 HZN 34.4
S-LOC 32	6720-1 1/4 1675 (1700-1 1/4)	6720-1 1/2 1675 (1700-1 1/2)	6720-3 1675 (1700-3)	
CIRCLING	6720-1 1/4 1670 (1700-1 1/4)	6720-1 1/2 1670 (1700-1 1/2)	6720-3 1670 (1700-3)	

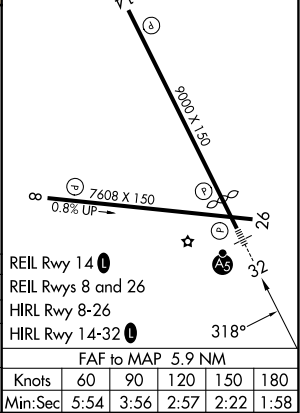

SW-4, 25 DEC 2025 to 22 JAN 2026

SW-4, 25 DEC 2025 to 22 JAN 2026