

WAAS CH 40212 W36A	APP CRS 005°	Rwy Ldg 11601 TDZE 92 Apt Elev 96
--	------------------------	--

RNAV (GPS) RWY 36R
ORLANDO INTL (MCO)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000.

ALSF-2




MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DNMR and hold, continue climb-in-hold to 3000.

D-ATIS 121.25	ORLANDO APP CON 124.8 307.0	ORLANDO TOWER 118.45 253.5 (17L/35R, 17R/35L) 124.3 253.5 (18L/36R, 18R/36L)	GND CON 126.4 (E) 121.8 (W)
-------------------------	---------------------------------------	--	---

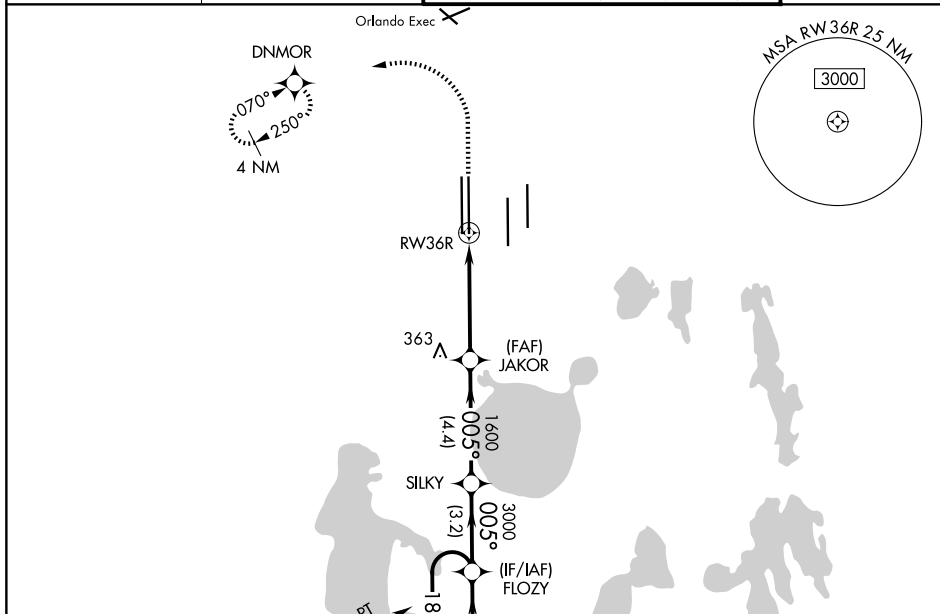

ELEV 96	D	TDZE 92
---------	----------	---------

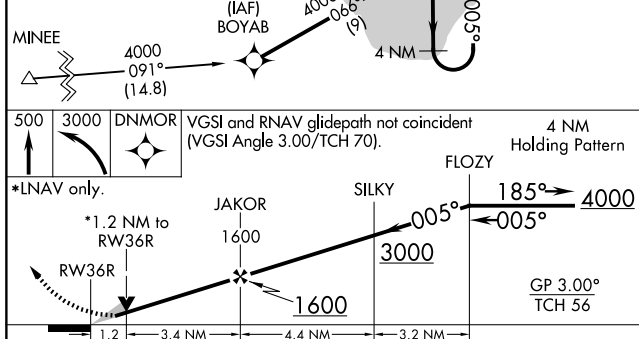

CATEGORY		A	B	C	D
LPV	DA	292/18		200 (200-½)	
LNAV/ VNAV	DA	454/40		362 (400-¾)	
LNAV	MDA	540/24 448 (500-½)		540/45 448 (500-¾)	
CIRCLING		740-1 644 (700-1)		740-2 644 (700-1¾) 644 (700-2)	

