

WAAS CH 40103 W18A	APP CRS 186°	Rwy Ldg 10000 TDZE 889 Apt Elev 896
--	------------------------	--

RNAV (GPS) Y RWY 18L
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C and D visibility to 1 1/2 SM.

MALSR

MISSED APPROACH: Climb to 3000 direct LAPER and on track 136° to FLM VOR/DME and hold.

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
--------------------------	--	---	-------------------------

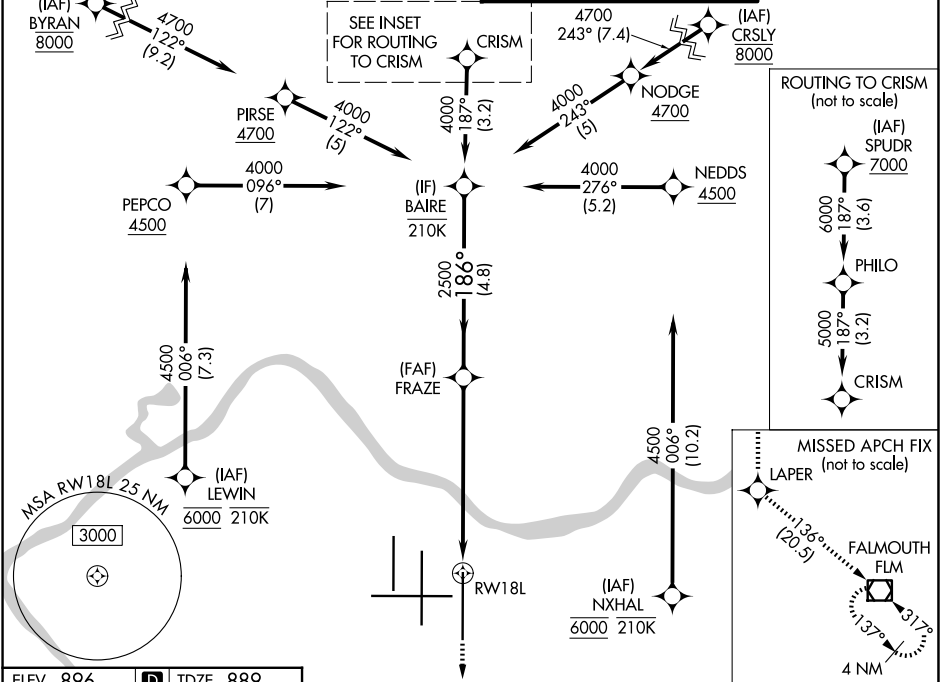

ELEV 896	D	TDZE 889
HIRL all Rwys TDZ/CL all Rwys except 27		
CATEGORY		
LPV DA		
LNAV/VNAV DA		
LNAV MDA		
CIRCLING		