

VORTAC DBQ	APP CRS	Rwy Ldg
115.8	304°	6502
Chan 105		TDZE 1062
		Apt Elev 1077

VOR RWY 31
DUBUQUE RGNL (DBQ)


V

VOR minimums: For inop ALS, increase S-31 Cats C and D visibility to 2 SM.
ZUKOB fix minimums: For inop ALS, increase S-31 Cats C and D visibility to 1½ SM.


MALSR

MISSED APPROACH: Climbing right turn to 3500 on DBQ VORTAC R-322 to CASSY INT/ 25 DME and hold.

ATIS 127.25	CHICAGO CENTER 133.95 281.4	DUBUQUE TOWER ★ 119.5 (CTAF) 0 254.4	GND CON 121.8	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

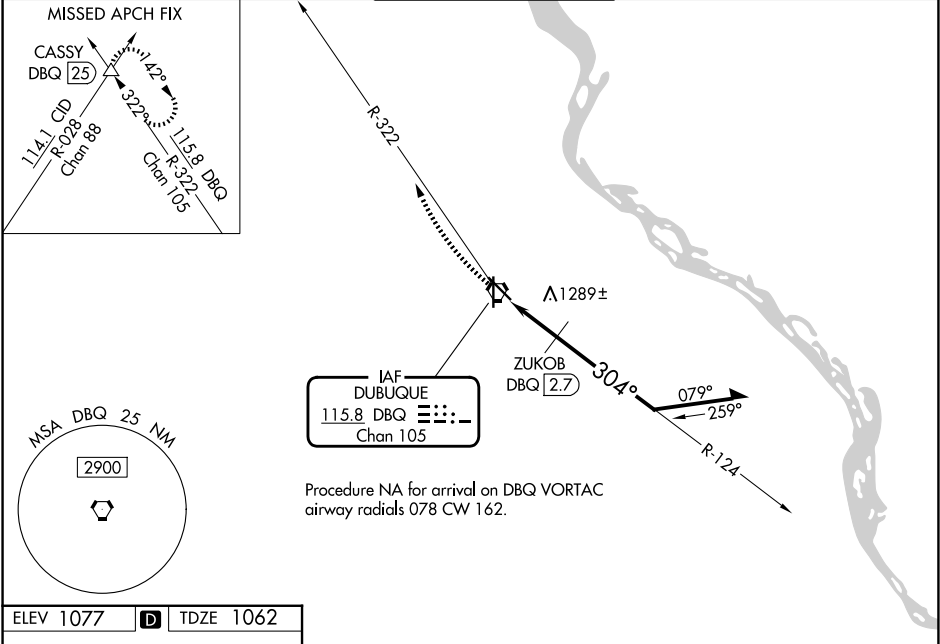

ELEV 1077	D	TDZE 1062
-----------	----------	-----------

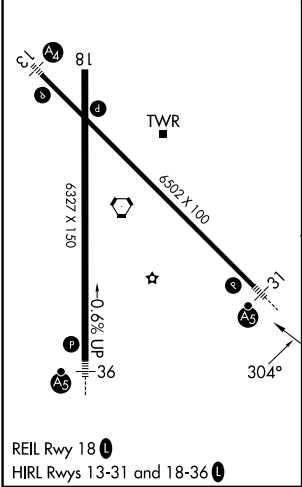

3500 CASSEY DBQ R-322	DBQ VORTAC	Remain within 10 NM	124°	2700	304°	1820*	DBQ 1.9	DBQ 2.7	3.07°	TCH 57	1.3 NM	0.8 NM
CATEGORY	A	B	C	D								
S-31	1820-1/2 758 (800-1/2)	1820-3/4 758 (800-3/4)	1820-1 1/4 743 (800-1 1/4)	758 (800-1 3/4)								
CIRCLING	1820-1 743 (800-1)	1820-1 1/4 743 (800-1 1/4)	1820-2 1/4 743 (800-2 1/4)	1820-2 1/2 743 (800-2 1/2)								
ZUKOB FIX MINIMUMS												
S-31	1540-1/2	478 (500-1/2)	1540-1 478 (500-1)									
CIRCLING	1580-1 503 (600-1)	1600-1 523 (600-1)	1600-1 1/2 523 (600-1 1/2)	1800-2 723 (800-2)								