

WAAS CH 86617 W14A	APP CRS 135°	Rwy Ldg TDZE 803 Apt Elev 808
--	------------------------	---



RNAV (GPS) RWY 14
SOUTHERN WISCONSIN RGNL (JVL)

RNP APCH-GPS.

⚠ Circling Rwy 18 NA at night. Baro-VNAV NA when using Rockford altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. VDP NA when using Rockford altimeter setting. When local altimeter setting not received, use Rockford altimeter setting and increase LPV DA to 1072 feet, LNAV/VNAV DA to 1291 feet, and all MDAs 80 feet; increase LPV all Cats visibility $\frac{1}{8}$ SM, LNAV/VNAV all Cats visibility $\frac{1}{4}$ SM, LNAV Cat C/D visibility $\frac{1}{4}$ SM, and Circling Cat C/D visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 3100 direct TIRRO and hold.

ATIS 128.25	ROCKFORD APP CON 121.0 327.0	JANESVILLE TOWER ★ 118.8 (CTAF) 225.4	GND CON 121.65	UNICOM 122.95
-----------------------	--	---	--------------------------	-------------------------

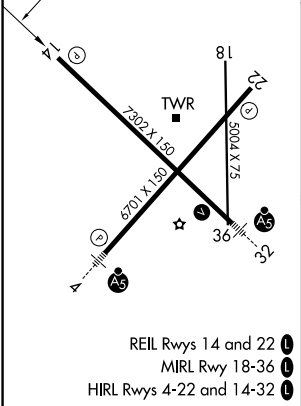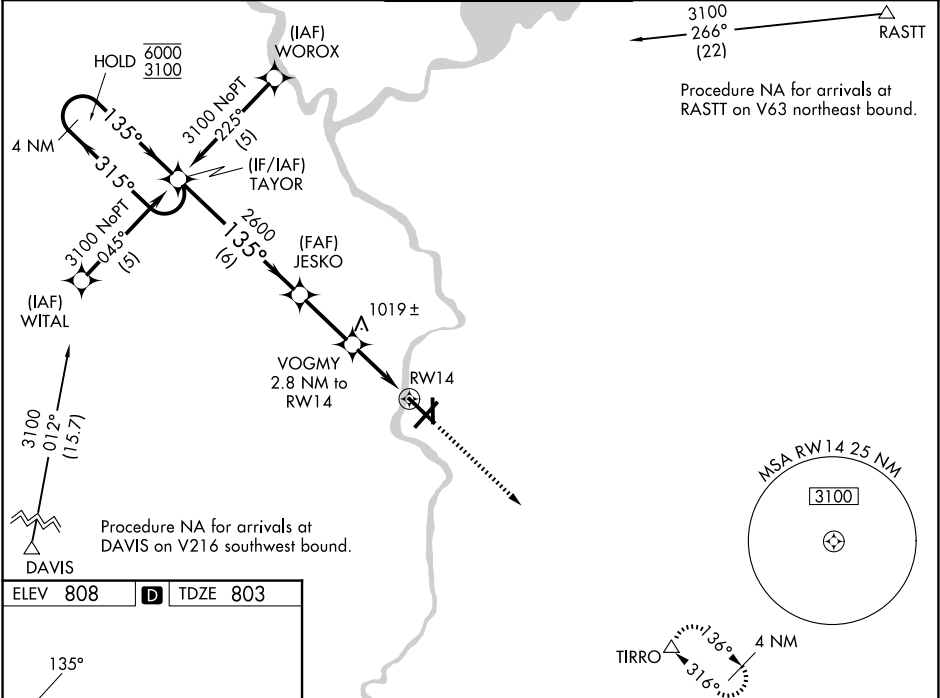

4 NM Holding Pattern TAYOR				3100	TIRRO
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 55).					
6000 ← 315°					
3100 → 135°					
GP 3.00° TCH 60					
JESKO 2600 VOGMY 2.8 NM to RW14					
*1740					
*1.3 NM to RW14					
RW14					
6 NM 2.6 NM 1.5 NM 1.3 NM					
CATEGORY	A	B	C	D	
LPV DA	1003-3/4		200 (200-3/4)		
LNAV/VNAV DA	1222-1 1/8		419 (500-1 1/8)		
LNAV MDA	1280-1	477 (500-1)	1280-1 3/8 477 (500-1 3/8)	1280-1 3/8 477 (500-1 3/8)	
CIRCLING	1280-1 472 (500-1)	1320-1 512 (600-1)	1420-1 3/4 612 (700-1 3/4)	1460-2 652 (700-2)	

EC-3, 25 DEC 2025 to 22 JAN 2026

EC-3, 25 DEC 2025 to 22 JAN 2026