


APP CRS 023°	Rwy Ldg 11050 TDZE 439 Apt Elev 439
------------------------	--

RNAV (RNP) Z RWY 2L
FAIRBANKS INTL (FAI) (PAFA)

RNP AR APCH - GPS.   -29°C For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.10* all Cats visibility to RVR 4500, increase RNP 0.10 all Cats visibility to RVR 5500, and increase RNP 0.30 all Cats visibility to RVR 6000.	ALSF-2 	MISSED APPROACH: Climb to 5000 on track 023° USAZY then right turn to ODIFU and track 184° to KRNNL and hold. *Missed approach requires minimum climb of 222 feet per NM to 2420.
--	--	---

ATIS 124.4	FAIRBANKS APP CON 125.35 363.2	FAIRBANKS TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 127.6
----------------------	--	---------------------------------------	-------------------------	--------------------------

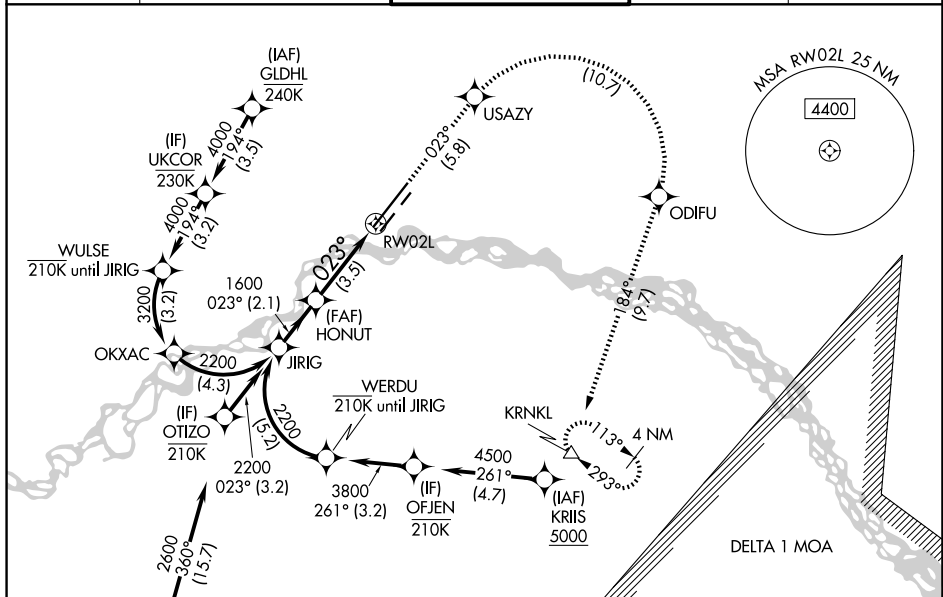

(IAF) GLOWS
5000 240K

JIRIG 2200

HONUT 1600

RWY 20L

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

CATEGORY	A	B	C	D
RNP 0.10 DA*		755/24	316 (400-½)	
RNP 0.10 DA		805/35	366 (400-⅝)	
RNP 0.30 DA		855/40	416 (500-¾)	

AUTHORIZATION REQUIRED

ELEV 439 TDZE 439

TWR

REIL Rwy 20L
TDZ/CL Rwy 2L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R