

WAAS
CH **77501**
W21A


APP CRS
207°

Rwy Idg
TDZE **1540**
Apt Elev **1540**

RNAV (GPS) RWY 21

VENANGO RGNL (F'KL)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (114°F). Circling Rwy 12 NA at night. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM. MALSR MISSED APPROACH: Climb to 3400 direct BUVCA and hold.			AWOS-3PT 118.175		YOUNGSTOWN APP CON ★ 126.25 322.3		CLNC DEL 126.25		UNICOM 122.7 (CTAF) 0	
--	--	--	----------------------------	--	---	--	---------------------------	--	---------------------------------	--

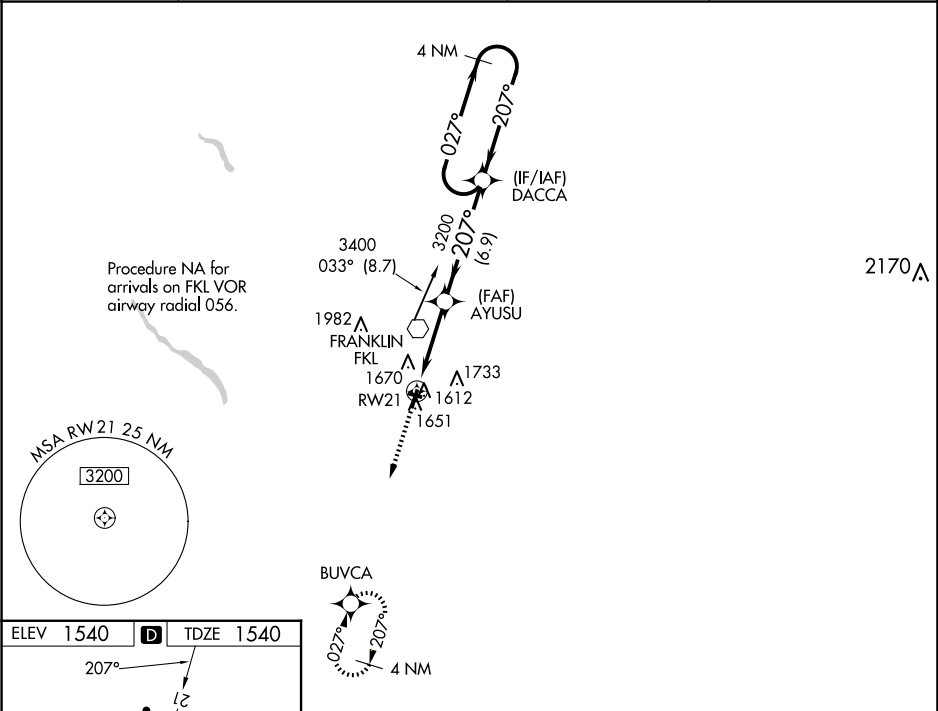

ELEV 1540 **D** TDZE 1540

3400 BUVCA		4 NM Holding Pattern		
* LNAV only.		AYUSU 3200		
* 1 NM TO RW21		DACCA		
RW21		GP 3.00° TCH 55		
1 NM		4 NM		
6.9 NM		3400		
CATEGORY	A	B	C	D
LPV DA	1803-½ 263 (300-½)			
LNAV/VNAV DA	1901-¾ 361 (400-¾)			
LNAV MDA	1900-½ 360 (400-½)		1900-⅝ 360 (400-⅝)	
CIRCLING	1960-1¼ 420 (500-1¼)	2000-1¼ 460 (500-1¼)	2040-1½ 500 (500-1½)	2100-2 560 (600-2)