

WAAS CH 77617 W09A	APP CRS 090°	Rwy Idg 5998 TDZE 96 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 9
ESLR RGNL (E/SF')

RNP APCH-GPS.


▼

⚠


Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILULE and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

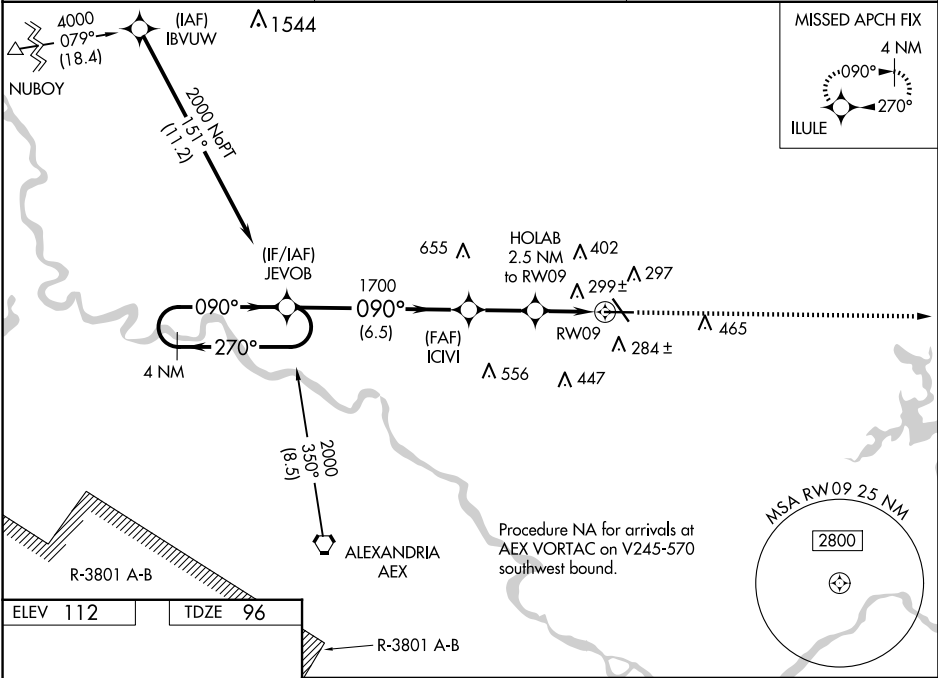

ELEV 112	TDZE 96
-----------------	----------------



REIL Rws 9, 14 and 32
MIRL Rwy 14-32
HIRL Rwy 9-27

4 NM Holding Pattern JEVOB				3000	ILULE
2000 ← 270° → 090°				*LNAV only.	
GP 3.00° TCH 53				*1.3 NM to RW09	
6.5 NM 2.4 NM 1.2 NM 1.3 NM				RW09	
CATEGORY	A	B	C	D	
LPV DA	296-3¼		200 (200-¾)		
LNAV/VNAV DA	609-1¾		513 (500-1¾)		
LNAV MDA	560-1	464 (500-1)	560-1¾	464 (500-1¾)	
CIRCLING	600-1	488 (500-1)	740-1¾ 628 (700-1¾)	760-2 648 (700-2)	

SC-4, 25 DEC 2025 to 22 JAN 2026

SC-4, 25 DEC 2025 to 22 JAN 2026