




| | | |
|--|------------------------|---|
| WAAS CH 53635 W18A | APP CRS 175° | Rwy Ldg 6080 TDZE 42 Apt Elev 46 |
|--|------------------------|---|

RNAV (GPS) RWY 18


CORPUS CHRISTI INTL (CRP)

| | | |
|--|------------|--|
| RNP APCH - GPS. | MALSRL | MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold. |
| <p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to 3/4 SM, all LNAV/VNAV visibilities to 7/8 SM, and LNAV Cat C, D, and E visibility to 1 3/4 SM.</p> | | |

| | | | | |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|
| ATIS 126.8 | CORPUS APP CON 120.9 348.725 | CORPUS TOWER 119.4 257.8 | GND CON 121.9 269.15 | CLNC DEL 118.55 |
|----------------------|--|------------------------------------|--------------------------------|---------------------------|

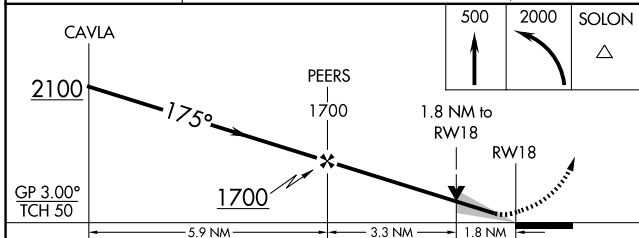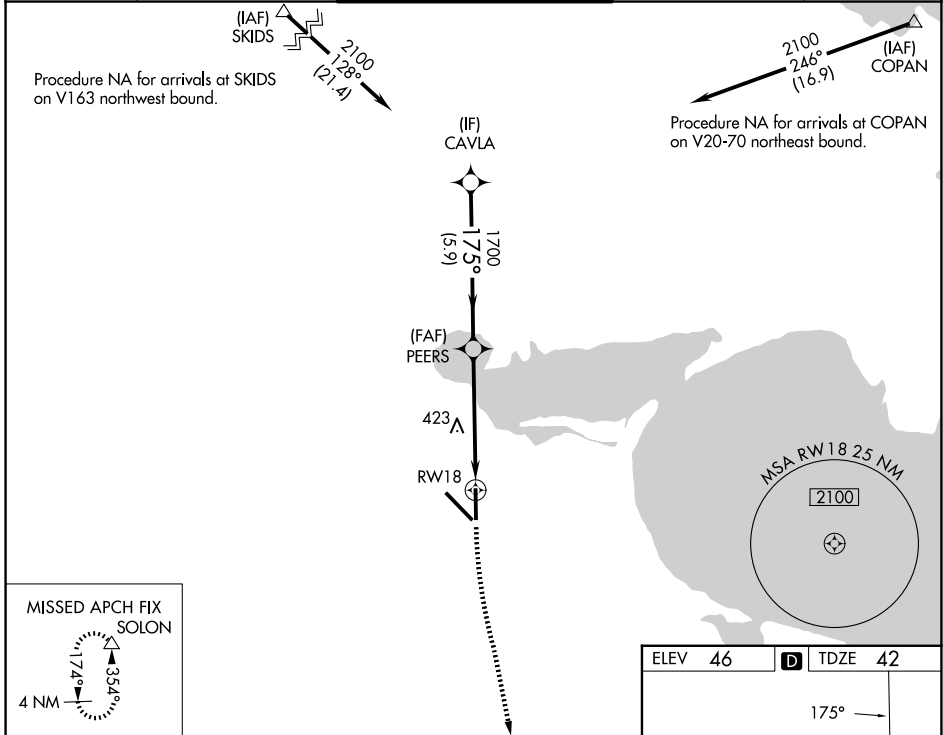

| CATEGORY | A | B | C | D | E |
|--------------|----------------------|----------------------|------------------------------|------------------------------|------------------------------|
| LPV DA | | 242-1/2 | 200 (200-1/2) | | |
| LNAV/VNAV DA | | 345-1/2 | 303 (300-1/2) | | |
| LNAV MDA | 660-1/2 | 618 (700-1/2) | 660-1 3/8 | 618 (700-1 3/8) | |
| CIRCLING | 660-1 614 (700-1) | 780-1 734 (800-1) | 820-2 1/4 774 (800-2 1/4) | 820-2 1/2 774 (800-2 1/2) | 820-2 3/4 774 (800-2 3/4) |

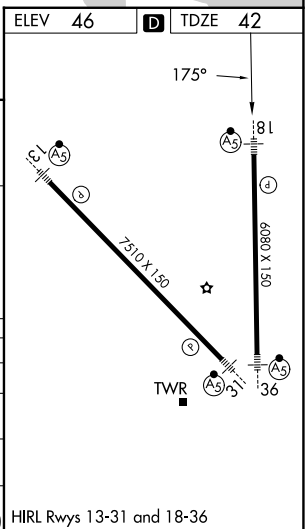

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026