

WAAS CH 60914 W31A	APP CRS 312°	Rwy Ldg TDZE 43 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)



RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
Procedure NA when Cabaniss Fld traffic patterns active. For inop ALS, increase LPV Cat E
visibility to ¾ SM, LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cat E visibility to 1¾ SM.



MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

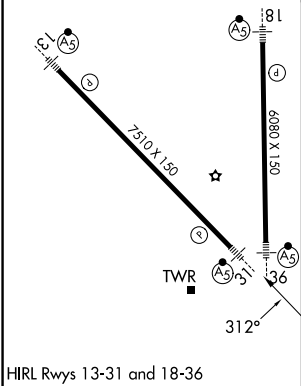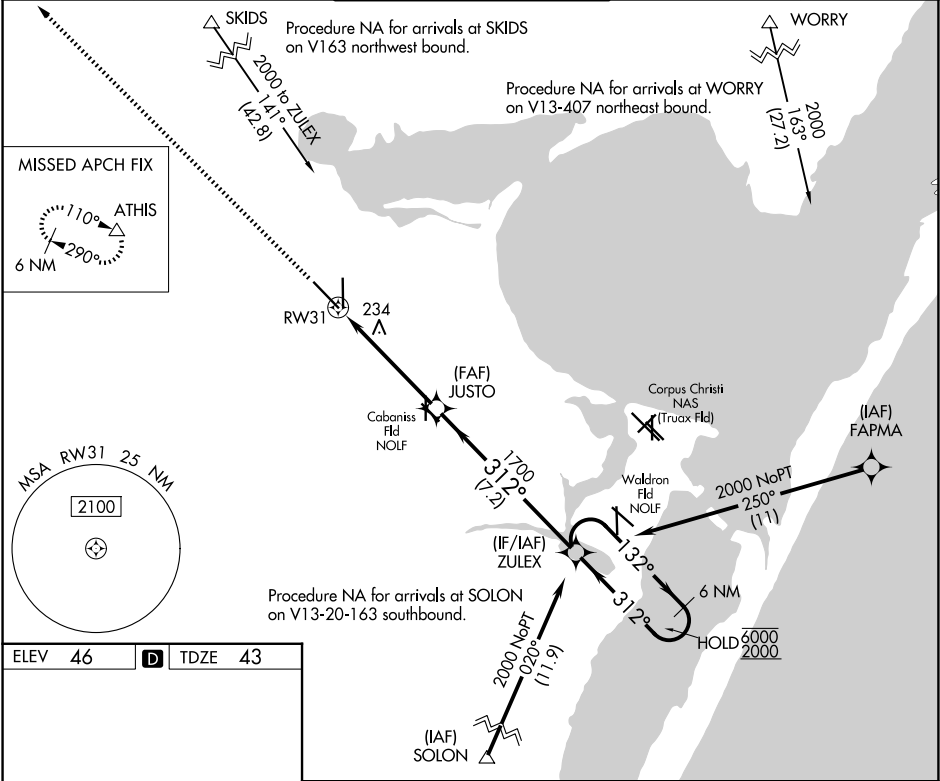

2000 ↑		ATHIS △		JUSTO 1700		ZULEX 6 NM Holding Pattern					
		1.3 NM to RW31 1.3 NM		3.8 NM		7.2 NM					
		RW31 1.3 NM		312° 1700		132° 6000 2000 GP 3.00° TCH 50					
CATEGORY		A		B		C		D		E	
LPV DA				243-½		200 (200-½)					
LNAV/VNAV DA				356-⅝		313 (400-⅝)					
LNAV MDA		500-½		457 (500-½)		500-⅞		457 (500-⅞)			
CIRCLING		500-1 454 (500-1)		780-1 734 (800-1)		820-2¼ 774 (800-2¼)		820-2½ 774 (800-2½)		820-2¾ 774 (800-2¾)	

SC-3, 25 DEC 2025 to 22 JAN 2026

SC-3, 25 DEC 2025 to 22 JAN 2026