


WAAS CH 45522 W09A	APP CRS 090°	Rwy Ldg TDZE 707 Apt Elev 712
--	------------------------	---

RNAV (GPS) RWY 9

AURORA MUNI (ARR)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 2500 direct HOGIE and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.			
ATIS 125.85	CHICAGO APP CON 133.5 349.0	AURORA TOWER ★ 120.6 (CTAF) 0	GND CON 121.7

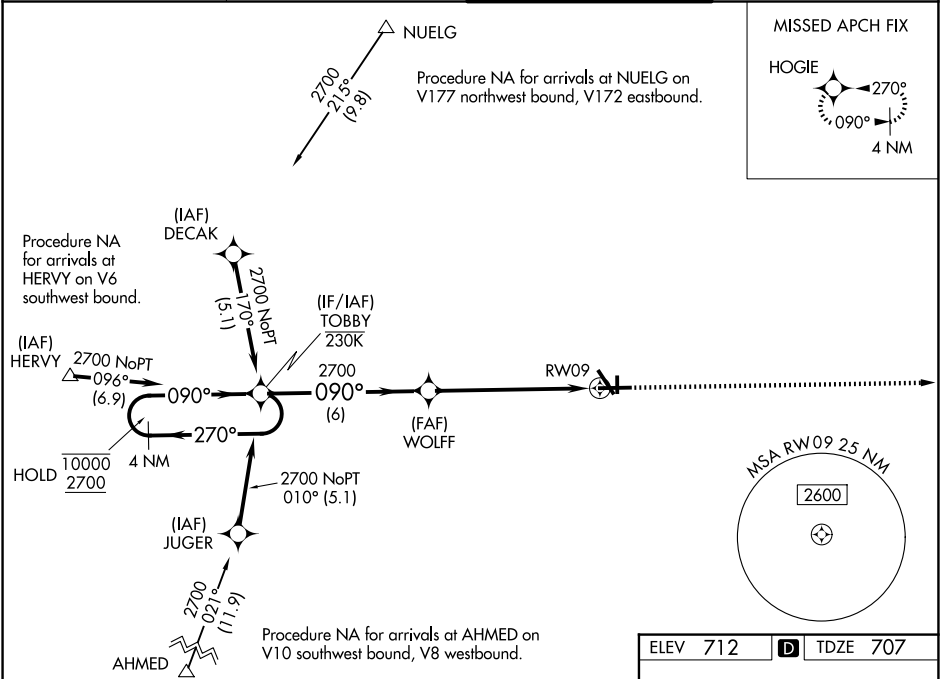

4 NM Holding Pattern		TOBBY	WOLFF	2500	HOGIE
10000 2700		2700	2700	2700	2700
GP 3.00° TCH 45		2700	2700	2700	2700
6 NM		4.6 NM	1.5 NM	1.5 NM	1.5 NM
CATEGORY	A	B	C	D	
LPV DA	957-½		250 (300-½)		
LNAV/VNAV DA	1035-½		328 (400-½)		
LNAV MDA	1220-½ 513 (600-½)		1220-1 513 (600-1)		
CIRCLING	1220-1 508 (600-1)		1300-1½ 588 (600-1½) 1320-2 608 (700-2)		

ELEV 712

TDZE 707

4 NM Holding Pattern

TOBBY

WOLFF

2500

HOGIE

*LNAV only.

*1.5 NM to RWY 9

RWY 9

6 NM

4.6 NM

1.5 NM

GP 3.00° TCH 45

6501

33

36

3198 X 75

5503 X 100

81

27

090°

TWR

MIRL Rwy 18-36

HIRL Rwy 15-33 and 9-27

REIL Rwy 15, 18, 27, and 36