

LOC I-BMG <u>108.3</u>	APP CRS 354°	Rwy Ldg 6500 TDZE 844 Apt Elev 846
----------------------------------	------------------------	---


ILS or LOC/DME RWY 35
MONROE COUNTY (BMG)

▼ Circling to Rwy 6/24 NA at night. When local altimeter setting not received, use Terre Haute Rgnl altimeter setting; increase S-ILS 35 DA to 1165 and all MDA 140 feet and increase S-ILS 35 all Cats visibility $\frac{1}{4}$ SM, S-LOC 35 Cat C and D and Circling Cat C and D visibility $\frac{1}{2}$ SM. For inoperative MALSR when using Terre Haute Rgnl altimeter setting: increase S-ILS 35 all Cats visibility to $1\frac{1}{4}$ miles. DME from OOM VORTAC. Simultaneous reception of I-BMG and OOM DME required.



MISSED APPROACH:
Climb to 2000 then
climbing left turn to
2500 direct OOM
VORTAC and hold.

ASOS 134.525	HULMAN APP CON 128.025 339.8	BLOOMINGTON TOWER * 120.775 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------	---------------------------------	---	------------------	------------------

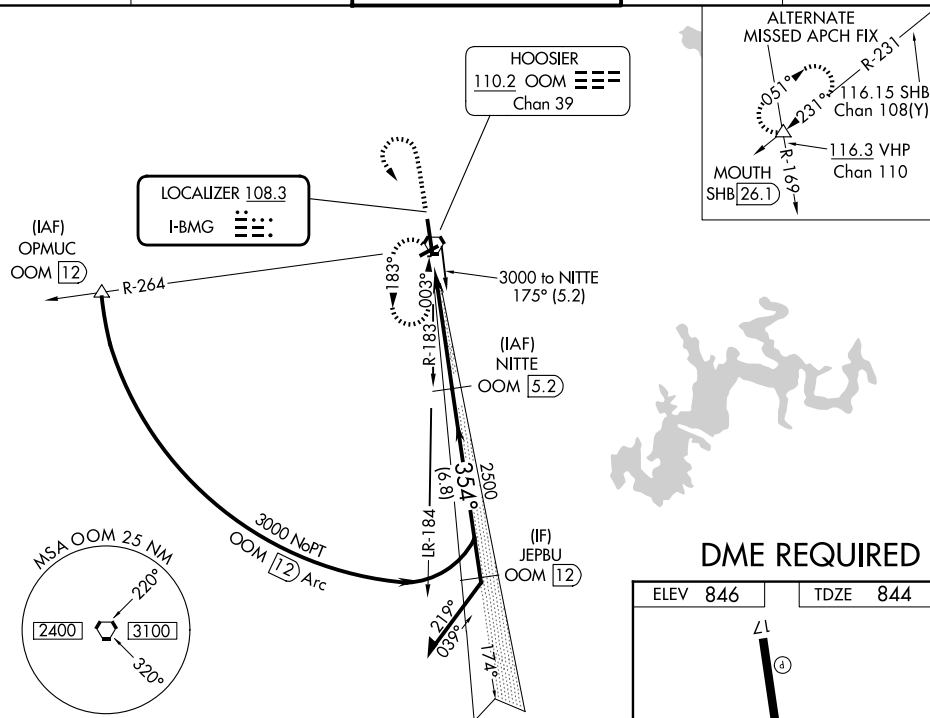

DME REQUIRED

ELEV	846	TDZE	844
FAF to MAP 5 NM			
Knots	60	90	120
Min:Sec	5:00	3:20	2:30
			2:00
			1:40

CATEGORY	A	B	C	D
S-ILS 35	1044-½ 200 (200-½)			
S-LOC 35	1420-½ 576 (600-½)		1420-1 576 (600-1)	1420-1¼ 576 (600-1¼)
CIRCLING	1420-1 574 (600-1)		1420-1½ 574 (600-1½)	1620-2½ 774 (800-2½)