

WAAS CH 86738 W07A	APP CRS 075°	Rwy Ldg TDZE Apt Elev 3502 8 8
--	------------------------	--

RNAV (GPS) RWY 7

PROVINCETOWN MUNI (PVC)

RNP APCH - GPS.


▼

Baro-VNAV and VDP NA when using HYA altimeter setting. Circling Rwy 25 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Inop table does not apply to LPV. For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to ¾ SM. When local altimeter setting not received, use HYA altimeter setting: increase LPV DA to 271 feet, increase LNAV/VNAV DA to 331 feet; increase all MDA 80 feet.

MALSF

MISSED APPROACH:
Climb to 3000 direct WULGA and hold.

AWOS-3PT 119.275	BOSTON APP CON 118.2	CLNC DEL 120.65	UNICOM 122.8 (CTAF)	122.85
----------------------------	--------------------------------	---------------------------	-------------------------------	---------------

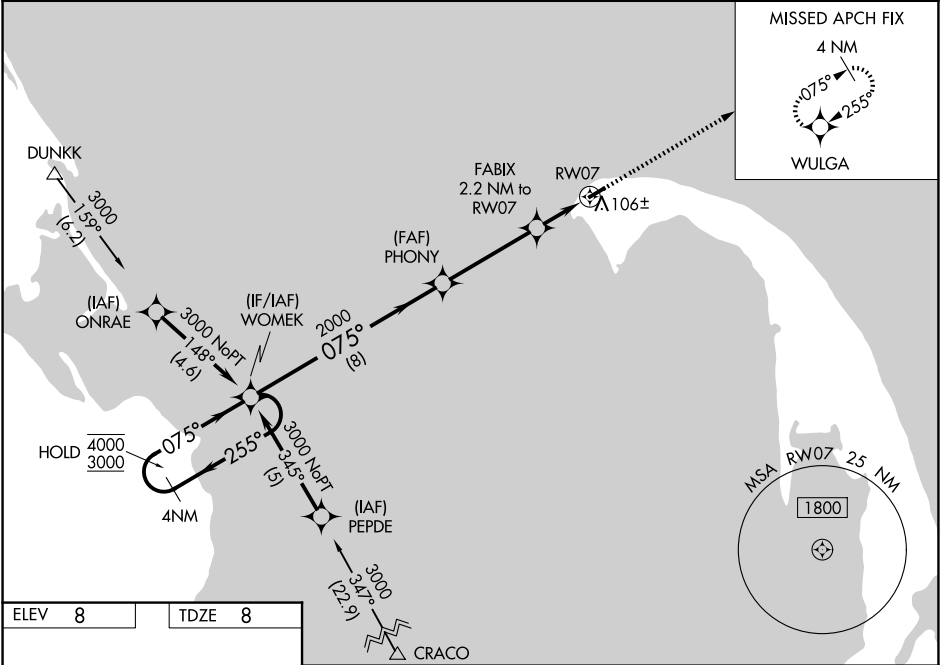

ELEV 8

TDZE 8

REIL Rwy 25

HIRL Rwy 7-25

4 NM Holding Pattern		WOMEK		3000 WULGA	
4000 ← 255°		3000 → 075°			
GP 3.00°		TCH 40		PHONY 2000	
				FABIX 2.2 NM to RW07	
				1 NM to RW07	
				RW07	
				740	
				8 NM	
				3.9 NM	
				1.2 NM	
				1 NM	
CATEGORY	A	B	C	D	
LPV DA	208-¾	200 (200-¾)	NA		
LNAV/VNAV DA	268-¾	260 (300-¾)	NA		
LNAV MDA	360-¾	352 (400-¾)	NA		
CIRCLING	460-1 452 (500-1)	660-1 652 (700-1)	NA		