

RNAV (GPS) RWY 32

WAAS CH 91281 W32A	APCH CRS 323°	Rwy Idg 4529 TDZE 68 Arpt Elev 74
---------------------------------	------------------	--

- (USA)

DAVISON AAF (KDAA)

RNP APCH-GPS

T * When ALS inop, increase RVR to 45, vis to 7/8 mile.
** When ALS inop. increase vis to 1 3/8 miles.

MALS

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct UDCY and hold.

ATIS 128.175	POTOMAC APP CON 118.95 319.1	TOWER ★ 124.275 (CTAF) 0 229.4	GND CON 121.9 351.8	CLNC DEL 351.8
-----------------	---------------------------------	-----------------------------------	------------------------	-------------------

• 483


*** When ALS inop, increase CAT
AB RVR to 55, vis to 1 mile;
CAT CD vis to 1 1/2 miles.

For uncompensated
Baro-VNAV systems,
LNAV/VNAV NA below
-15°C or above 54°C.

If local altimeter setting
not received, use Ronald
Reagan Washington
National altimeter setting.


Baro-VNAV NA when using
Ronald Reagan Washington
National altimeter setting.

Visibility reduction
by helicopters NA.

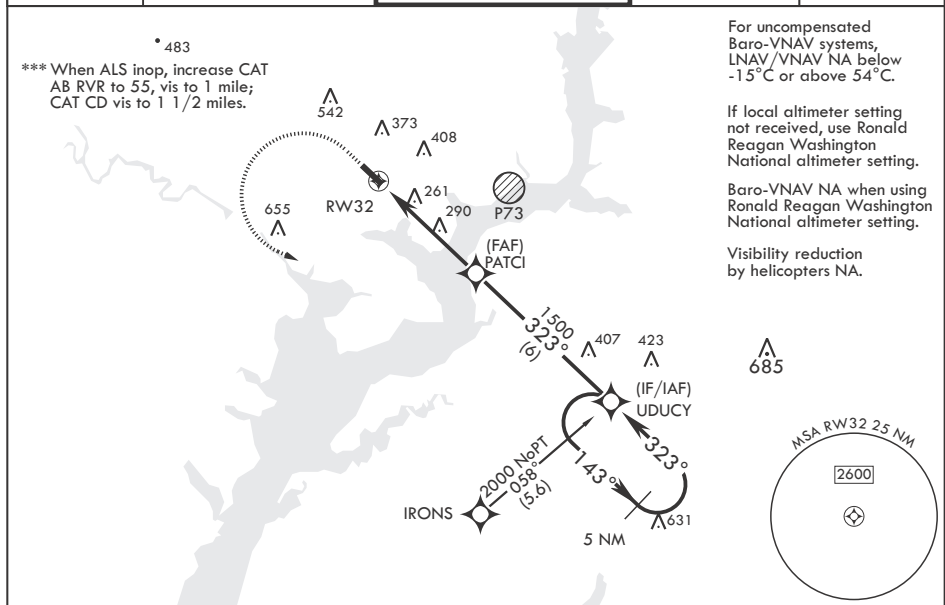

600	2000	UDUCY	VGSI and RNAV GP not coincident (VGSI Angle 3.00/TCH 35).	UDUCY	5 NM Holding Pattern	ELEV 74	TDZE 68
↑ crs 322°	↖			143° ➡		Rwy 14 Idg 4930' Rwy 32 Idg 4529'	
					2000		

VDP NA with Ronald Reagan Washington National Altimeter Setting.

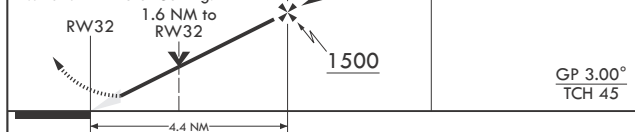


CATEGORY	A	B	C	D
LPV DA *	351/40	283	(300-34)	
LNAB/VNAB DA **	481/50	413	(500-1)	
LNAB MDA ***	540/40	472 (500-34)	540/60	472 (500-1%)
 CIRCLING	700-1 626 (700-1)	740-1 666 (700-1)	800-2 726 (800-2)	1000-3 926 (1000-3)

RONALD REAGAN WASHINGTON NATIONAL ALTIMETER MINIMUMS

LPV DA *	384/40	316	(400-¾)
LNAV/VNAV DA	514/55	446	(500-1)
LNAV MDA ***	580/40	512 (600-¾)	580-1¼ 512 (600-1¼)
 CIRCLING	720-1 646 (700-1)	780-1 706 (800-1)	820-2¼ 746 (800-2¼) 1040-3 966 (1000-3)

ELEV 74	TDZE 68
Rwy 14 ldg 4930'	
Rwy 32 ldg 4529'	



RNAV (GPS) RWY 32