

WAAS CH 77601 W06A	APP CRS 059°	Rwy Idg TDZE 831 Apt Elev 839
--	------------------------	---

RNAV (GPS) RWY 6

ANN ARBOR MUNI (ARB)

RNP APCH.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP and Baro-VNAV NA when using Willow Run altimeter setting. When local altimeter setting not received, use Willow Run altimeter setting and increase all DA/MDA 40 feet; increase LNAV Cats C and D visibility ½ SM.

MISSED APPROACH: Climb to 3000 direct VAQOL and hold.

ATIS 134.55	DETROIT APP CON 118.95 284.0	ANN ARBOR TOWER ★ 120.3 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6	UNICOM 123.0
-----------------------	--	--	-------------------------	--------------------------	------------------------

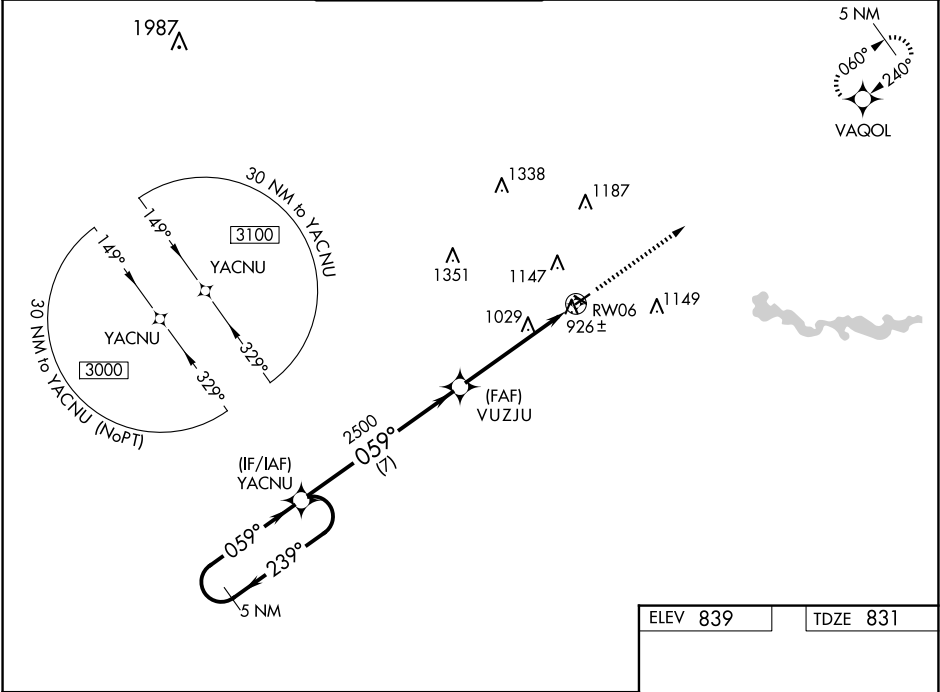

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 20).

3000 VAQOL

5 NM Holding Pattern

GP 3.00° TCH 40

YACNU

VUZJU

RW06

*LNAV only.

*1.6 NM to RW06

7 NM

3.5 NM

1.6 NM

2500

2500

059°

239°

059°

059°

ELEV 839

TDZE 831

TWR

3505 X 75

2730 X 110

0.6% UP 80

059°

MIRL Rwy 6-24 0

REIL Rwy 6 0

CATEGORY	A	B	C	D
LPV DA	1081-1 250 (300-1)			
LNAV/VNAV DA	1097-1 266 (300-1)			
LNAV MDA	1360-1 529 (600-1)		1360-1½ 529 (600-1½)	

EC-1, 25 DEC 2025 to 22 JAN 2026

EC-1, 25 DEC 2025 to 22 JAN 2026