


WAAS CH 82641 W17A	APP CRS 167°	Rwy Ldg TDZE Apt Elev	4000 722 722
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 17
FORT MADISON MUNI (F'SW)

RNP APCH - GPS. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BRL altimeter setting. When local altimeter setting not received, use BRL altimeter setting; increase LPV DA to 1004 feet; increase LNAV/VNAV DA to 1004 feet; increase all MDAs 40 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cat D ¼ SM.	MISSED APPROACH: Climb to 2600 direct DRIBS and hold.
---	---

AWOS-3 120.925	CHICAGO CENTER 135.6 316.1	UNICOM 122.8 (CTAF) 📶
--------------------------	--------------------------------------	--

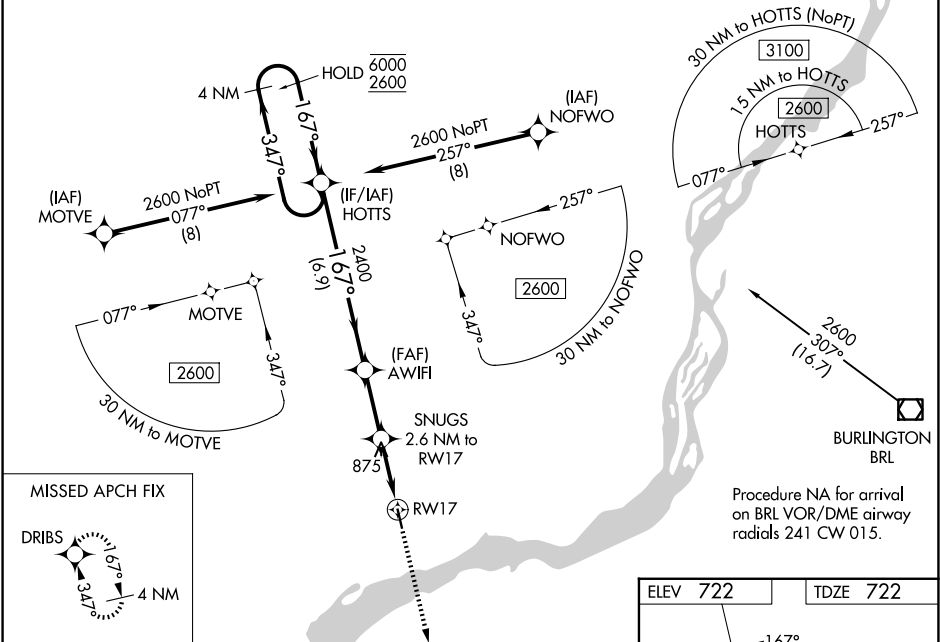

4 NM Holding Pattern 6000 ← 347° 2600 → 167° GP 3.00° TCH 50		HOTTs		AWIFI		SNUGS		2600		DRIBS	
				2400		2.6 NM to RW17					
				167°		1.2 NM to RW17					
				2400		1.2 NM to RW17					
				6.9 NM		2.5 NM		1.4 NM		1.2 NM	
CATEGORY	A	B	C	D							
LPV DA	972-1		250 (300-1)								
LNAV/ VNAV DA	972-1		250 (300-1)								
LNAV MDA	1140-1	418 (500-1)	1140-1½		418 (500-1½)						
CIRCLING	1200-1	478 (500-1)	1260-1½		538 (600-1½)		1500-2½		778 (800-2½)		

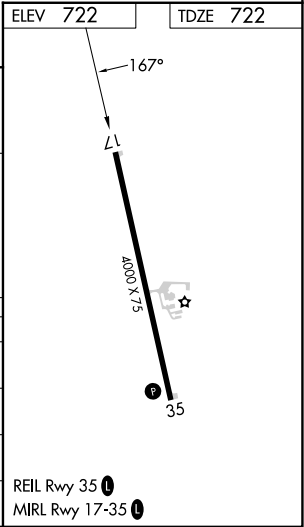

NC-3, 25 DEC 2025 to 22 JAN 2026

NC-3, 25 DEC 2025 to 22 JAN 2026