


WAAS CH 56304 W16A	APP CRS 165°	Rwy Ldg TDZE Apt Elev	4400 1055 1060
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16

ROSEAU MUNI/RUDY BILLBERG FLD (R.O.X)

RNP APCH - GPS. ⚠ Circling NA to Rwys 6 and 24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to ¾ SM. Inop table does not apply to LPV all Cats.	MALSF 	MISSED APPROACH: Climb to 2800 direct ACEBO and hold.
---	-----------	--

AWOS-3PT 118.075	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF)
----------------------------	---	-------------------------------

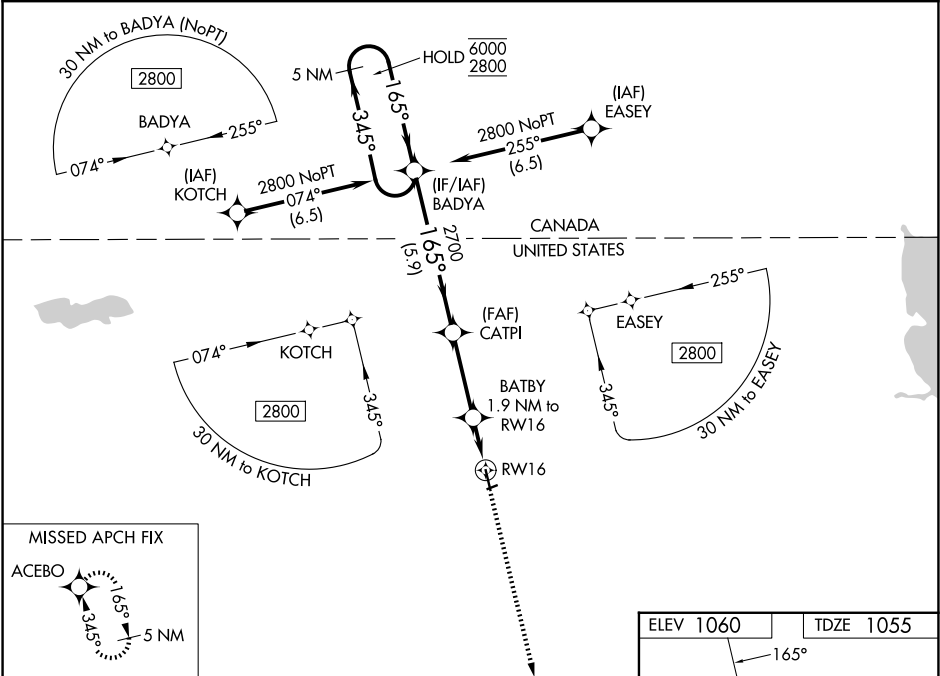

5 NM Holding Pattern 6000 ← 345° 2800 → 165°		BADYA CATPI 2700		BATBY 1.9 NM to RW16 1 NM to RW16 RW16		2800 ↑	ACEBO ✳
GP 3.00° TCH 44		2700 1700		5.9 NM 3.1 NM 0.9 NM 1 NM			
CATEGORY	A	B	C	D			
LPV DA	1255 ⁻³ / ₄ 200 (200 ⁻³ / ₄)						
LNAV/VNAV DA	1330 ⁻³ / ₄ 275 (300 ⁻³ / ₄)						
LNAV MDA	1420 ⁻³ / ₄ 365 (400 ⁻³ / ₄)						
CIRCLING	1600-1	540 (600-1)		1840-2 ¹ / ₄ 780 (800-2 ¹ / ₄)	1840-2 ¹ / ₂ 780 (800-2 ¹ / ₂)		

