

WAAS CH 60903 W28A	APP CRS 285°	Rwy Idg 6453 TDZE 967 Apt Elev 968
--	------------------------	---

RNAV (GPS) RWY 28

STATESVILLE RGNL (SVH)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase LPV DA to 1218, LNAV/VNAV DA to 1269, and all MDA 60 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility $\frac{1}{8}$, and Circling Cat C $\frac{1}{4}$ mile. VDP and Baro-VNAV NA when using Lincoln altimeter setting. For inop MALSR, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to $\frac{1}{2}$ mile. For inop MALSR when using Lincoln altimeter setting, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility to 1 mile.

MALSR



MISSED APPROACH:
Climb to 1380 then
climbing right turn
to 3400 direct
SANFI and hold.

AWOS-3 119.225	ATLANTA CENTER 125.15 263.0	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------------------

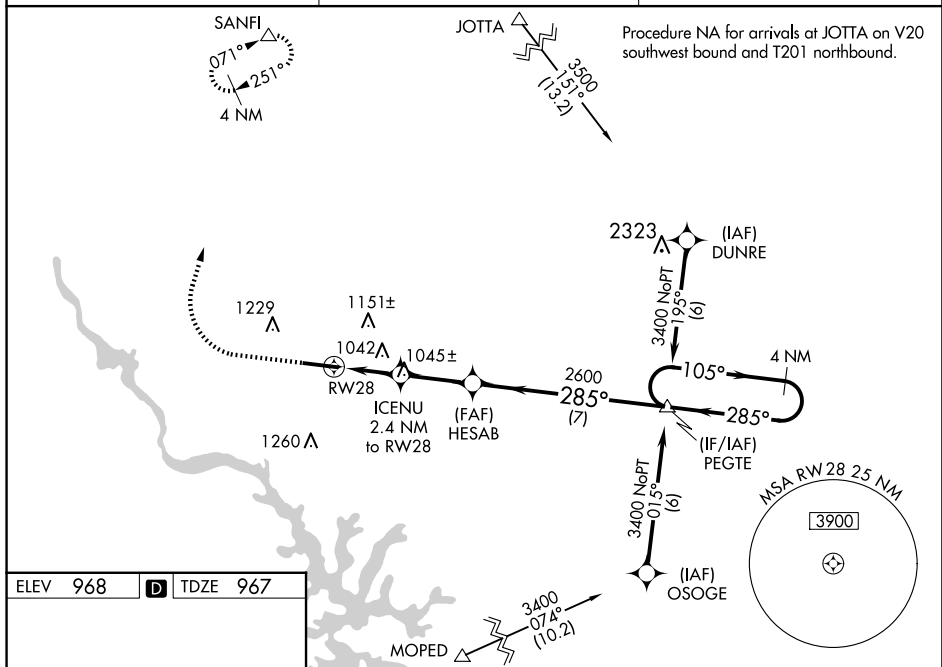

4 NM Holding Pattern

105° 285° 3400

285° 2600 1760 2600

0.9 NM 1.5 NM 2.6 NM 7 NM

HESAB 2600

ICENU 2.4 NM to RW28

0.9 NM to RW28

RW28

285°

7003 X 100

285°

CATEGORY	A	B	C	D
LPV DA		1167- ³ / ₄	200 (200- ³ / ₄)	
LNAV/VNAV DA		1218- ³ / ₄	251 (300- ³ / ₄)	
LNAV MDA		1300- ³ / ₄	333 (400- ³ / ₄)	
C CIRCLING	1420-1 452 (500-1)	1540-1 572 (600-1)	1540-1½ 572 (600-1½)	1560-2 592 (600-2)

GP 3.00° TCH 50

REIL Rwy 10 **I**
HIRL Rwy 10-28 **L**