

STARKVILLE, MISSISSIPPI

AL-5699 (FAA)

22363

WAAS CH 53604 W36A	APP CRS 360°	Rwy Idg 5550 TDZE 326 Apt Elev 333
--	------------------------	---

RNAV (GPS) RWY 36


GEORGE M BRYAN (STF)

RNP APCH-GPS.



V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Golden Triangle Rgnl altimeter setting and increase LPV DA to 566 feet; increase LNAV/VNAV DA to 690 feet; increase all MDA's 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Golden Triangle Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct FESBO and hold, continue climb-in-hold to 3400.

AWOS-3PT 118.975	COLUMBUS APP CON★ 135.6 323.275	CLNC DEL 126.25	UNICOM 122.7 (CTAF) L
----------------------------	---	---------------------------	--

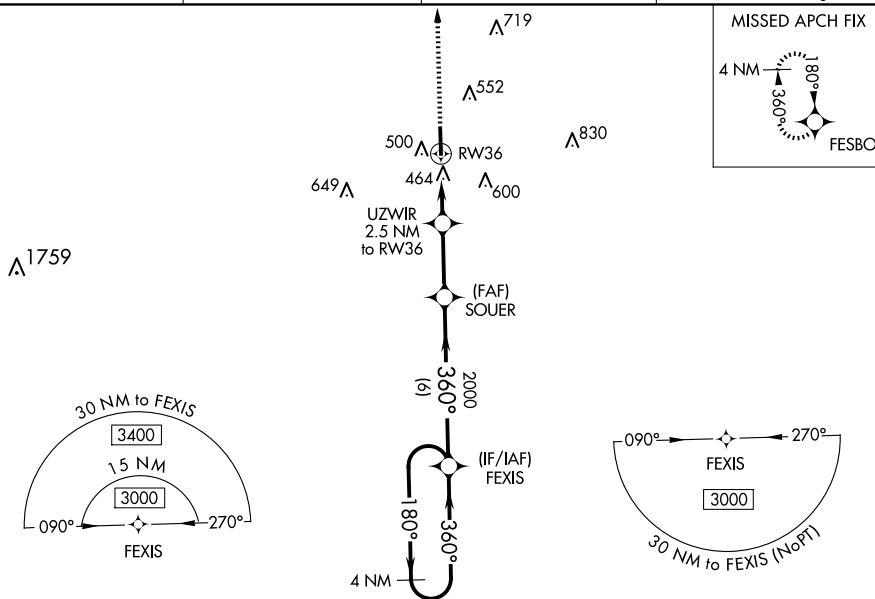

ELEV	333		TDZE	326
------	-----	--	------	-----

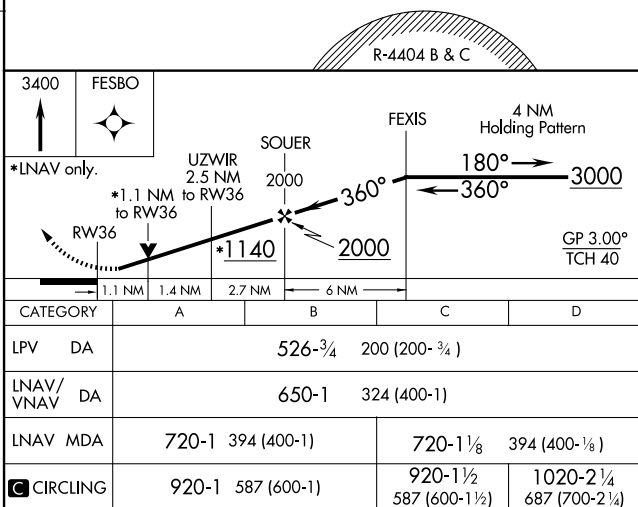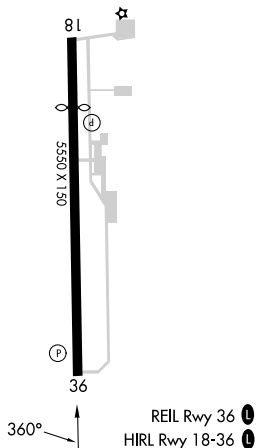

CATEGORY	A	B	C	D
LPV DA	526- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	650-1 324 (400-1)			
LNAV MDA	720-1 394 (400-1)		720-1 $\frac{1}{8}$ 394 (400- $\frac{1}{8}$)	
 CIRCLING	920-1 587 (600-1)		920-1 $\frac{1}{2}$ 587 (600-1 $\frac{1}{2}$)	1020-2 $\frac{1}{4}$ 687 (700-2 $\frac{1}{4}$)

STARKVILLE, MISSISSIPPI

Amdt 3B 06OCT22

33°26'N-88°51'W

GEORGE M BRYAN (STF)

RNAV (GPS) RWY 36

SC-4, 25 DEC 2025 to 22 JAN 2026